


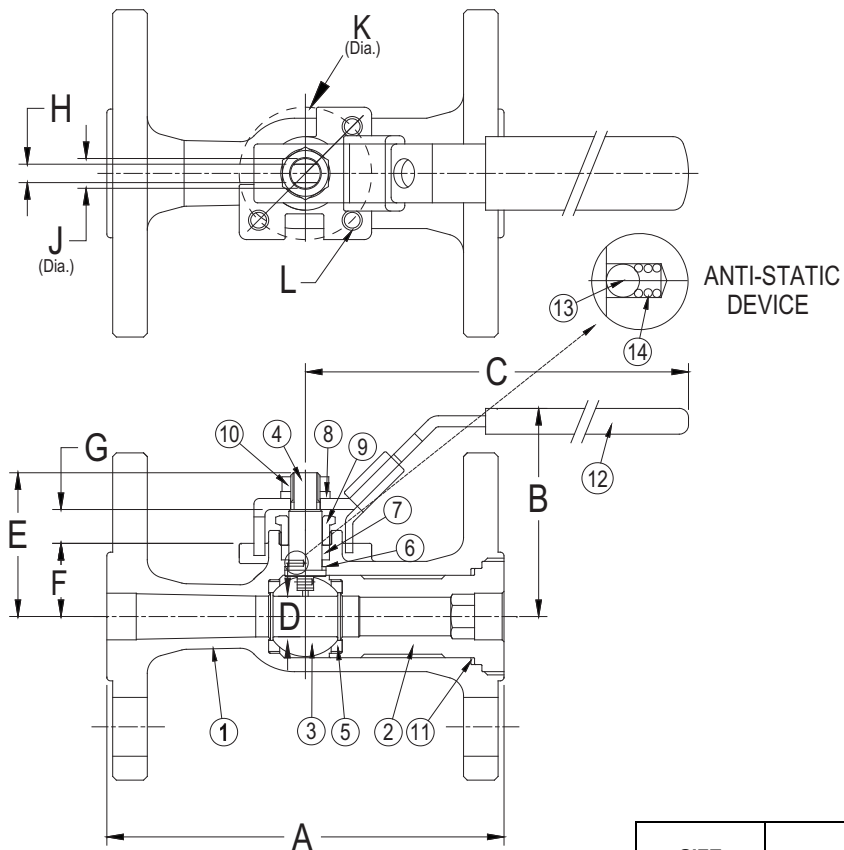

PARTS LIST		
ITEM	DESCRIPTION	MATERIAL
1	Body	Stainless Steel (ASTM 351, CF8M)
2	Tailpiece	Stainless Steel (ASTM 351, CF8M)
3	Ball	Stainless Steel (ASTM 351, CF8M) or 316SS
4	Stem	Stainless Steel (ASTM A 276, 316)
5	Seat (2)†	R-PTFE
6	Thrust Washer	PTFE
7	Stem Packing	Graphite
8	Lock Washer	Stainless Steel (304SS)
9	Packing Gland	Stainless Steel (ASTM A 276, 316)
10	Lock Nut	Stainless Steel (304SS)
11	Body Gasket	Graphite
12	Handle Assembly	Stainless Steel (300 Series SS)
13	Grounding Ball (2)	Stainless Steel (304SS)
14	Grounding Spring (2)	Stainless Steel (304SS)

DRAWING NO.
AL 104940

Product Numbers†	SIZE	DIMENSIONS (in)											ISO Pattern	WEIGHT (lbs)
	in	A	B	C	D	E	F	G	H	J	K	L		
BVF1RF4RSSRGSL-050	1/2	5.50	2.21	5.04	0.43	1.53	0.78	0.350	0.20	0.31	1.42	¼"-20 UNC	F03	4.7
BVF1RF4RSSRGSL-075	3/4	6.00	2.72	5.63	0.59	2.06	1.03	0.425	0.28	0.44	1.65	¼"-20 UNC	F04	7.2
BVF1RF4RSSRGSL-100	1	6.50	2.98	5.63	0.81	2.33	1.33	0.402	0.28	0.44	1.65	¼"-20 UNC	F04	8.1

†See "Style BVF1 Product Number Configuration" for additional options.

BODY PRESSURE & TEMPERATURE RATINGS – NON SHOCK	
MEDIA	½" to 1"
W.O.G.	720 PSI @ 100°F
Saturated Steam (WSP)	250 PSI @ 406°F

KECKLEY

3400 CLEVELAND SKOKIE ILLINOIS

DRAWING NO.
AL 104940

DIMENSIONAL ASSEMBLY

PART NO.

Style BVF1 300lb. Unibody

SCALE: NTS

Ball Valves

DATE: 10/17/2014

MAT'L: (As Noted Above)

REQ. ---

DR. BY DSF