





UPC Code: 07847736339
Country Of Origin: Mexico

**NEMA:** 5-20R



# M5362-IG

#### **Brand Features**

The Lev-Lok® Modular Wiring Device System is engineered for fast and easy installation. These devices employ a simple twist and lock wiring module that ensures a safe, reliable connection while at the same time providing for extremely fast and easy installation. Lev-Lok brand wiring devices address the reliability and performance concerns of specification engineers without sacrificing the contractor's need for fast, easy installation. Available in extra heavy duty hospital and industrial grades, and heavy duty commercial grade platforms.

## **Item Description**

Lev-Lok Isolated Ground Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Smooth Face, 20 Amp, 125 Volt, Modular, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Orange<br/>br><strong>Mating Lev-Lok Wiring Module Required for Use</strong>

#### **Technical Information**

AC Horsepower Ratings
Horsepower Rating: 1 HP

Electrical Specifications

Amperage: 20 A

Voltage: 125 VAC

Pole: 2 Wire: 3

Dielectric Voltage: Withstands 2000V

per UL498

Current Limiting: Full Rated Current Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Grounding: Self-Grounding

Environmental Specifications

Flammability: Rated V-2 per UL94

Operating Temperature: -40°C to 60°C

Material Specifications

Body Material: Nylon

Face Material: Nylon

**Strap Material:** Galvanized Steel **Line Contacts:** 0.040" Thick Solid Brass

**Locking Pins:** Solid Brass **Isolated Ground System:** Brass

Ground Clips: Brass

Shutter Mechanism: Delrin® Acetal

Color: Orange

Mechanical Specifications

Lead Identification: Leads identified in accordance with UL 498 (black, white &

green)

**Product ID:** Markings are permanently marked on device

Product Features
NEMA: 5-20R
Color: Orange

Device Type: Duplex Receptacle Outlet

Feature 4: Smooth Face Function: Isolated Ground Grade: Heavy-Duty Industrial Specification Grade

Brand: Lev-Lok

Standards and Certifications

NEMA: WD-6 ANSI: C-73


UL 498: File E13399

**UL Fed Spec WC-596**: File E13399 **CSA C22.2 No. 42**: File 152105


**NOM:** 057

Warranty: 10-Year Limited

RoHS: Compliant

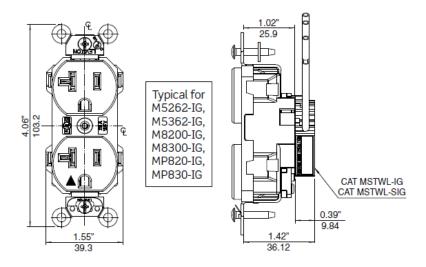

# Wiring Diagram



5-20R

# SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

#### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

 $\label{eq:temperature} \textbf{Teléfono: +1-800-323-8920} \cdot \textbf{FAX: +1-800-832-9538} \cdot \textbf{Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005}$ 

# Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

#### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

### Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

