





The 19 Series Ball Nose connectors and panel receptacles are insulated for water tightness and safety. They allow you to quickly connect or disconnect equipment. They have become the industry standard for multiple operator stations, distribution panels, stress relieving and numerous other applications.

## **Item Description**

19 Series Cam-Type Female Detachable Plug, Industrial Grade, Double Set Screw Termination, Ball Nose, Cable Range-350-500MCM, 690 Amp - WHITE

#### **Technical Information**

**Electrical Specifications** 

Max. Amperage: 690 Amp Max. Voltage: 600 Volt

Material Specifications

Sleeve Material: Santroprene TPV

Contact Material: Brass Strain Relief: Copper Wire Mechanical Specifications

Gender: Female


Connection Type: Double Set Screw Cable Range: 350-500MCM AWG

**Product Features** 

Cable Range: 350-500MCM AWG

Color: White

Contact Cat. No.: 19D24-C Insulator Cat. No.: 19SDF-W

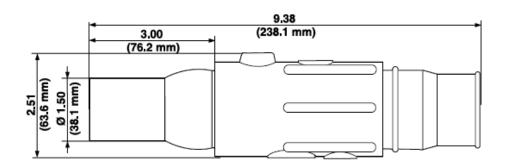

# Female Detachable Plug - Double Set Screw

# SPECIFICATION SUBMITTAL

Color:

White

UPC Code: 07847799541

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

# Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747
Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

## Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

### Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

## Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

