




**Color :**  Brown

**UPC Code :** 078477841440

**Country Of Origin :** Please Contact Customer Service.



**Available Colors :**

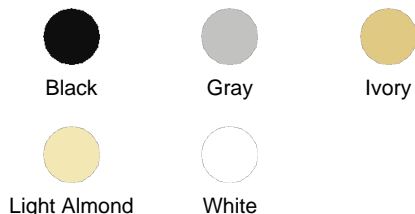

## T5833-B

5.1A USB Type A/Type-C Wall Outlet Charger with 20A Tamper-Resistant Receptacles

Combination Duplex Receptacle/Outlet and USB Charger. 20 Amp, 125 Volt, Decora Tamper-Resistant Receptacle/Outlet, NEMA 5-20R. 5.1 Amps, 5VDC, 2.0 Type A and Type-C USB Chargers. Grounding, Side Wired & Back Wired - Brown

- **SMART** – Built-in smart chip recognizes the individual device's charging requirement to optimize the charge
- **POWERFUL** – Two high-powered charging ports deliver a combined total of 5.1A charging current and 25+ watts of power
- **CONVENIENT** – No more searching for charging adapters! Upgrade your existing outlets so you can charge up to two USB powered electronics at once, leaving the outlets free for additional power needs
- **EASY** – USB-C has a reversible connector that can be easily inserted into the charging port in any direction

### Technical Information

#### Standards and Certifications

**Amperage :** 20 A  
**FCC Part 15 :** Class B  
**Grounding :** Grounding  
**Horsepower Rating :** 20A-1/2 HP  
**Listed :** cCSAus  
**NOM :** 057  
**Ratings :** 20A-125V  
**UL 1310 :** Yes  
**UL 498 :** Yes  
**Voltage :** 125 VAC  
**Warranty :** 5-Year Limited

#### Product Features

**Amperage :** 20 A  
**Brand :** Decora  
**Color :** Brown  
**Flammability :** Rated V-0 per UL 94  
**Grade :** Residential/Commercial Specification Grade  
**NEMA :** 5-20R  
**Operating Temperature :** -10°C to 40°C  
**Product Type :** Outlet/USB Combo  
**Type :** Type A/C Duplex Receptacle  
**Voltage :** 125 VAC  
**Wallplate :** Not Included

#### Electrical Specifications

**Amperage :** 20 A  
**Body Material :** Thermoplastic  
**Color :** Brown

**Cover Material :** Thermoplastic

**Grounding :** Grounding

**Horsepower Rating :** 20A-1/2 HP

**Ratings :** 20A-125V

**Strap Material :** Steel

**Voltage :** 125 VAC

#### Environmental Specifications

**Flammability :** Rated V-0 per UL 94  
**Operating Temperature :** -10°C to 40°C  
**Product ID :** Stamped on Strap  
**Terminal Accom. :** 14-12 AWG  
**Terminal ID :** Brass-Hot Black-Hot White-Neutral Green-Gnd  
**Termination :** Back & Side  
**Torque Range :** 12-14 inch pounds

#### Material Specifications

**Body Material :** Thermoplastic  
**Color :** Brown  
**Cover Material :** Thermoplastic  
**Grade :** Residential/Commercial Specification Grade  
**Strap Material :** Steel

#### Mechanical Specifications

**Listed :** cCSAus  
**NOM :** 057  
**Product ID :** Stamped on Strap  
**Terminal Accom. :** 14-12 AWG  
**Terminal ID :** Brass-Hot Black-Hot White-Neutral Green-Gnd  
**Termination :** Back & Side  
**Torque Range :** 12-14 inch pounds

**Warranty : 5-Year Limited**

**Features and Benefits**

- Ideal for residential and commercial applications including kitchens, bedrooms, home offices, college dormitories, airport lounges, hospitals, salons and spas, hotels, meeting rooms, cafes, restaurants and more
- Smart chip technology recognizes and optimizes the charging requirements of individual devices including Apple, Samsung, Nexus, Pixel and more
- One Type A Port and one Type-C Port; combined total of 5.1A of charging power
  - Type-C Port can charge maximum 3 Amps @ 5V
  - Type A Port can charge maximum 2.4 Amps @ 5V
- Tamper-Resistant improves child safety – built-in shutter prevents access by most non-rated/foreign objects
- USB Ports tested to withstand over 10,000 insertions
- Charges most Type A and Type-C USB powered devices
- Type-C Port permits the cables to be inserted easily in either direction
- Charging time may be affected by the charge cord used. Leviton recommends using the cord provided with the device
- Compatible with Decora® wallplates and Decora Plus™ screwless wallplates
- Compatible with USB 3.0, 2.0, 1.1 devices
- No data transfer capability
- Compatible with Decora® wallplates and Decora Plus™ screwless wallplates.  
Wallplate sold separately

**SPECIFICATION SUBMITTAL**

<b>JOB NAME:</b> <input type="text"/>	<b>CATALOG NUMBERS:</b> <input type="text"/>	
<b>JOB NUMBER:</b> <input type="text"/>	<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):  
+1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·  
FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-  
1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

