

60W48



Color:  Yellow

UPC Code: 07847706627

NEMA:
6-20R



Brand Features

Leviton's Wetguard line of industrial watertight wiring devices are the most versatile, well-engineered watertight devices on the market. They meet IP67 and NEMA ratings for water ingress protection, and offer many significant advantages over competitive brands.

Item Description

20 Amp, 250 Volt, NEMA 6-20R, 2P, 3W, Flip Lid with Receptacle, Narrow Body Single Receptacle, Straight Blade, Industrial Grade, Grounding, Wetguard Flip Lid, Side Wired, Nickel-Plated Brass Strap, - YELLOW

Technical Information

AC Horsepower Ratings

At Rated Voltage: 2 HP

Electrical Specifications

Grounding: Grounding

Amperage: 20 A

Voltage: 250 VAC

Pole: 2

Wire: 3

Dielectric Voltage: Withstands 2000V per UL498

Current Limiting: Full Rated Current

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Face Material: Thermoplastic Nylon

Body Material: Thermoplastic Nylon

UL498: File E13399

Line Contacts: Nickel-Plated Brass Triple-Wipe

Terminal Screws: Nickel-Plated Brass

Grounding Screw: Nickel-Plated Brass 8-32

Yoke: Nickel-Plated Brass

Clamp Nuts: Nickel-Plated Brass

Compression Nut, Strain Relief: Nylon

Wire Module: Thermoplastic

Bushing: Santoprene TPV

Blades/Contacts: Nickel-Plated Brass

Assembly Screws: Stainless Steel 300

Color: Yellow

Mechanical Specifications

Terminal ID: Brass-Hot, Green-Ground, Silver-Neutral

Terminal Accom.: 18-10 AWG

Product ID: Ratings and NEMA I.D. permanently marked on device

Cord Range: .375 - .655

Product Features

NEMA: 6-20R

Termination: Back

Face Material: Thermoplastic Nylon

Body Material: Thermoplastic Nylon

Strap Material: Nickel-Plated Brass

Color: Yellow

Brand: Wetguard

Device Type: Straight Blade Outlet

Standards and Certifications

CSA C22.2 No. 42: File LR-406

NEMA: WD-6

ANSI: C-73


UL: 498

UL Fed Spec WC-596: File E13399


NOM: 057

Warranty: Lifetime Warranty

Dimensional Diagram

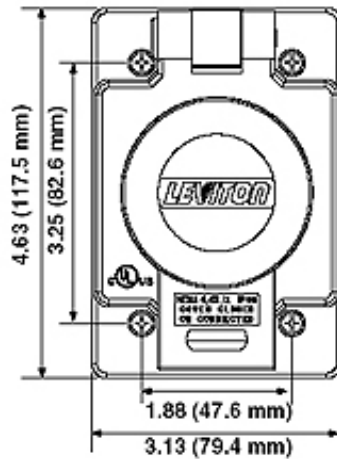

Wiring Diagram



6-20R

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

