


## Galvanized Self-Seal Roof Flashings

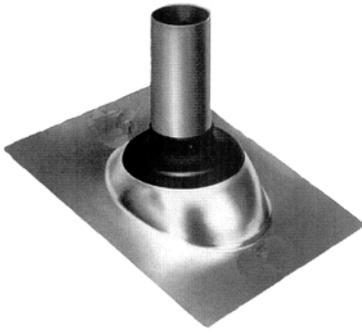

- ▶ Made of rust-proof, stamped 24 gauge galvanized steel

- ▶ Slips easily over DWV vent pipe - self-sealing to vent pipe surface, 40° pitch
- ▶ Approved for Type B Installations
- ▶ Self-sealing Non-Fading elastomeric collar
- ▶ 24 gauge galvanized steel base
- ▶ Collar will not crack, chip, peel or separate from aluminum
- ▶ Eliminates caulking - no sealing compound required
- ▶ Absolutely leak-proof & fits most roof sizes
- ▶ Accommodates all vent types - ie: plastic, copper, steel or cast iron
- ▶ For use on Shingled Roofs - not for hot mopped or built up Roofs

G12209 Multisize  
Simply remove inner  
ring at the indicated  
point on collar

Cat. No.	Outside Diameter of Pipe to be Flashing	Base		Case Qty	Wt/ Case
		Length	Width		
G11830	1/2", 3/4", 1"	9"	12.5"	12	11
G12201	1-1/4" to 1-1/2"	12.5"	9"	12	12
G12202	2"	12.5"	9"	12	12
G12203	3"	14.5"	11"	12	17
G12204	4"	15"	12"	12	23
G12209	1-1/2", 2", 3"	11"	14.5"	12	23


## AURORA Self-Seal SOLAR Roof Flashings



- ▶ Designed to flash around solar mounting systems
- ▶ Slips easily over Conduit - self-sealing to conduit surface
- ▶ Self-sealing elastomeric tear-out collar
- ▶ Collar will not crack, chip, peel or separate from metal base
- ▶ Eliminates caulking - no sealing compound required
- ▶ Absolutely leak-proof & fits most roof sizes
- ▶ Accommodates all conduit types - ie: PVC, Aluminum, steel
- ▶ For use in Shingled Roof Applications - not for hot mopped or built up Roofs

Cat. No.	Outside Diameter of Pipe to be Flashing	Base		Material	Case Qty	Wt/ Case
		Length	Width			
G11830	1/2", 3/4", 1"	9"	12.5"	Galvanized	12	11
G11831	1/2", 3/4", 1"	18"	18"	Galvanized	12	24
G11833	1/2", 3/4", 1"	18"	18"	Aluminum	12	11
G12801	1/2" to 1-1/2"	9.5"	12.5"	Galvanized	12	10
G12802	1/2" to 1-1/2"	9.5"	12.5"	Aluminum	12	6
G12803	1-1/2" to 3"	9.5"	12.5"	Galvanized	12	10
G12804	1-1/2" to 3"	9.5"	12.5"	Aluminum	12	6

## Metal Roof Flashings

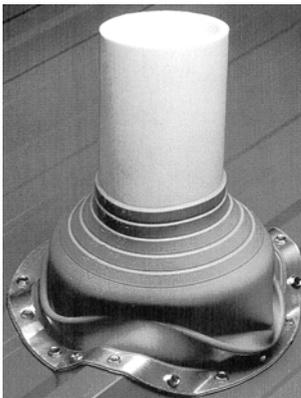

- ▶ Attaches to most corrugated metal decks, aluminum, copper, lead, plastic, fiberglass, etc.
- ▶ Applications include plumbing, heating & air conditioning pipes & vents, electrical service entrances, etc.
- ▶ Flexible, weather resistant E.P.D.M. resists ozone & UV light
- ▶ Pleated cone adjusts to any roof pitch & allows for complete flexibility
- ▶ Effectively isolates the pipe from the building movement created by expansion, contraction & vibration
- ▶ -30°F to 250°F continuous service temperature range
- ▶ Compatible with steel, PVC, copper & sheet metal pipes

Cat. No.	Outside Diameter of Pipe to be Flashing	Base Diameter	Height	Case Qty	Wt/ Case
G14741	1/4" to 2"	4-3/4"	3"	10	2
G14743	1/4" to 4"	7-3/4"	4"	5	4