

Catalog Number: U4551-RXL

Item Description: 200A 5T RL HD LVR OU

UPC Code: 784572139473

Brand Name: Milbank

Type: Ringless Meter Socket

Application: Meter Socket

Standard: UL Listed

Voltage Rating: 600 Volts Alternating Current

Amperage Rating: 200 Continuous Ampere

Phase: 1 Phase

Frequency Rating: 60 Hertz

Number Of Cutouts: 0

Cable Entry: Overhead and Underground

Terminal: Lay in Line Side and Lay in Load Side

Mounting: Surface Mount

Enclosure: Type 3R, G90 Galvanized Steel with

Powder Coat Finish

Additional Specifications: Number of Jaws:5 Terminal

Hub Opening and Closing Plates:Large Hub Opening Adapted To Small Closing

Plate

Hub Opening and Closing Plates:Large Hub Opening Adapted To Small Closing

Plate

Hub Opening and Closing Plates:Large Hub Opening Adapted To Small Closing

Plate

Hub Opening and Closing Plates:Large Hub Opening Adapted To Small Closing


Plate


Hub Opening and Closing Plates:Large Hub Opening Adapted To Small Closing


Plate




FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	5	U/L MNTG.EMBOSS
В	1	1/4 SOLID K.O.
С	1	14, 1/2 CONC. K.O.
D	2	1, 1¼, 1½, 2, 2½ CONC. K.O.
Е	4	1¼, 1½, 2, 2½, 3 CONC. K.O.

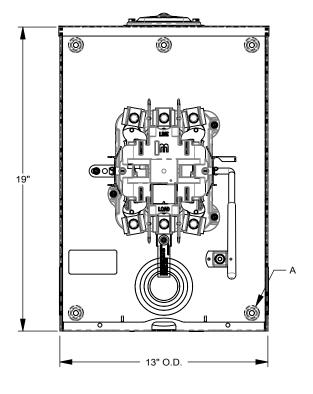

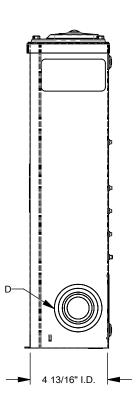



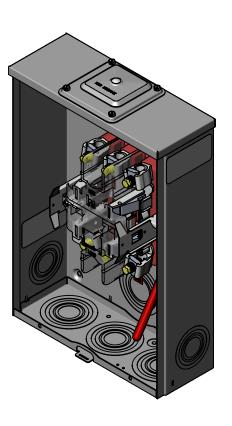



Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.