

Catalog Number: U4374-XT-5T9-AMS

Item Description: 200A CONDO UNITS 4 POS HD

784572721722

Brand Name: Milbank

Type: Ringless Meter Socket

**Application:** Meter Socket With Main

Standard: UL Listed

Voltage Rating: Up to 240 Volts Alternating Current

**UPC Code:** 

Amperage Rating: 200 Continuous Ampere

Phase: 1 Phase

Frequency Rating: 60 Hertz

Number Of Cutouts: 4

Cutout Size: Breaker Provision

Cable Entry: Overhead and Underground

**Terminal:** 3/8 Inch Stud Line Side and Single

Mechanical Load Side

Mounting: Surface Mount

**Enclosure:** Type 3R, G90 Galvanized Steel with

Powder Coat Finish

Additional Specifications: Number of Jaws:5 Terminal

Hub Opening and Closing Plates: Twin Large Closing Plates

Hub Opening and Closing Plates: Twin Large Closing Plates


Hub Opening and Closing Plates: Twin Large Closing Plates


Hub Opening and Closing Plates: Twin Large Closing Plates

Hub Opening and Closing Plates: Twin Large Closing Plates



FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	3	QUICK MNTG. EMBOSS
В	3	TRANS. MNTG.EMBOSS
С	2	1/4, 1/2 CONC. K.O.
D	6	1, 1¼, 1½, 2 CONC. K.O.
E	2	2, 2½, 3, 3½, 4 CONC. K.O.

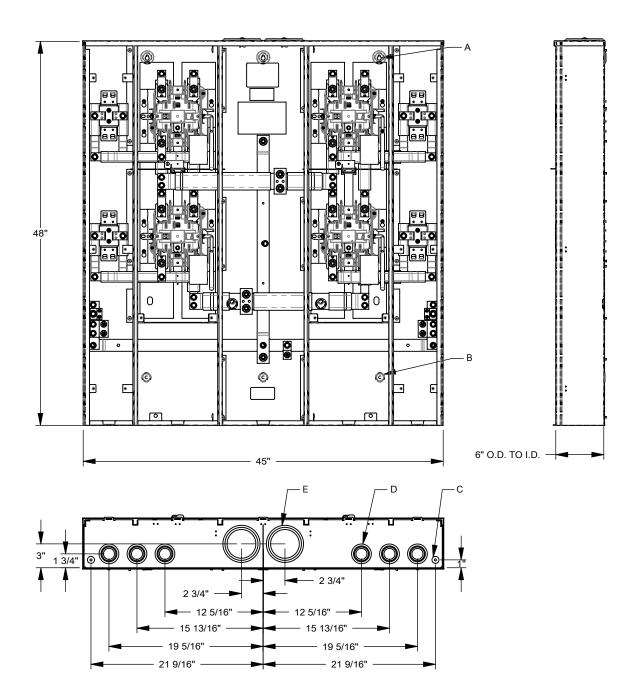

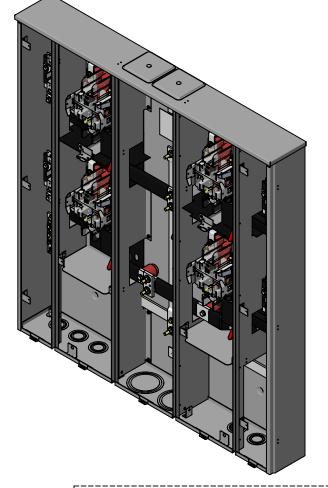



Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

1