

Catalog Number: U1748-O-5T9-WI

Item Description: 320A 5T RL HD LVR PED

784572288119

Brand Name: Milbank

Type: Ringless Meter Socket

**Application:** Meter Socket

Standard: UL Listed

Voltage Rating: 600 Volts Alternating Current

Amperage Rating: 320 Ampere Continuous

Phase: 1 Phase

Frequency Rating: 60 Hertz

Cable Entry: Underground

**Terminal:** 3/8 Inch Stud Line Side and Double

Mechanical Load Side Connector

**UPC Code:** 

Mounting: Pedestal

**Enclosure:** Type 3R, G90 Galvanized Steel with

Powder Coat Finish


Additional Specifications: Number of Jaws:5 Terminal


Hub Opening and Closing Plates:Plain Top

Bypass Provision:Lever Bypass


Number Positions: 1 Position



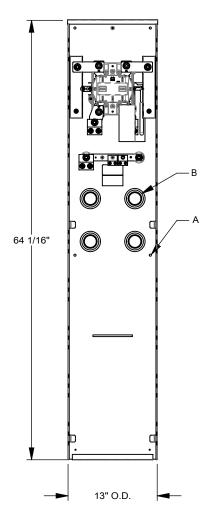

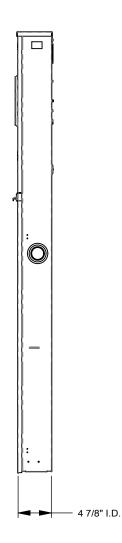

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	2	5/16 SOLID K.O.
В	6	11/4, 11/2, 2, 21/2 CONC. K.O.







Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

1

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.