



Catalog Number: U4031-O-2/200
Item Description: 320A 4T RL UG HD LVR MAIN
UPC Code: 784572139350

Brand Name: Milbank
Type: Ringless Meter Socket
Application: Meter Socket With Main
Standard: UL Listed
Voltage Rating: Up to 240 Volts Alternating Current
Amperage Rating: 320 Ampere Continuous
Phase: 1 Phase
Frequency Rating: 60 Hertz
Number Of Cutouts: 2
Cutout Size: 200 Ampere Main Breaker
Cable Entry: Underground, Side Wireway
Terminal: 3/8 Inch Stud Line Side and Single Mechanical Load Side
Mounting: Surface Mount
Enclosure: Type 3R, G90 Galvanized Steel with Powder Coat Finish





Additional Specifications:

- Line Side Wire Range: 6 AWG - 350 kcmil
- Load Side Wire Range: 1 AWG - 300 kcmil
- AIC or SCCR Rating: Please Contact Factory
- Optional Line Side Lug Kits: K1539, K1350, K1540
- Optional 5th Terminal Position: 3 O'Clock, 6 O'Clock, 9 O'Clock
- Maximum Amperage: 400 Maximum Ampere
- Number of Jaws: 4 Terminal
- Hub Opening and Closing Plates: Plain Top
- Bypass Provision: Lever Bypass
- Number Positions: 1 Position

Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	5	U/L MNTG.EMBOSS
B	1	¼, ½ CONC. K.O.
C	5	2, 2½, 3 CONC. K.O.
D	2	3, 3½, 4 CONC. K.O.

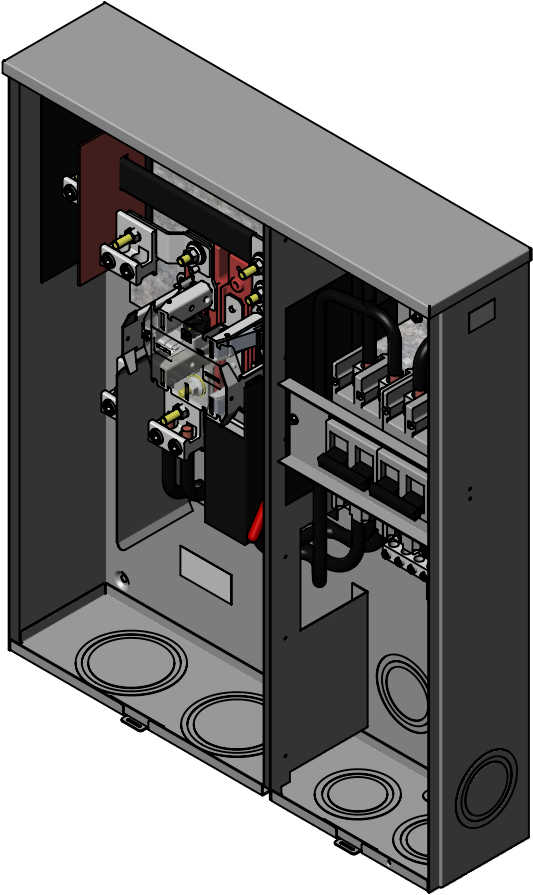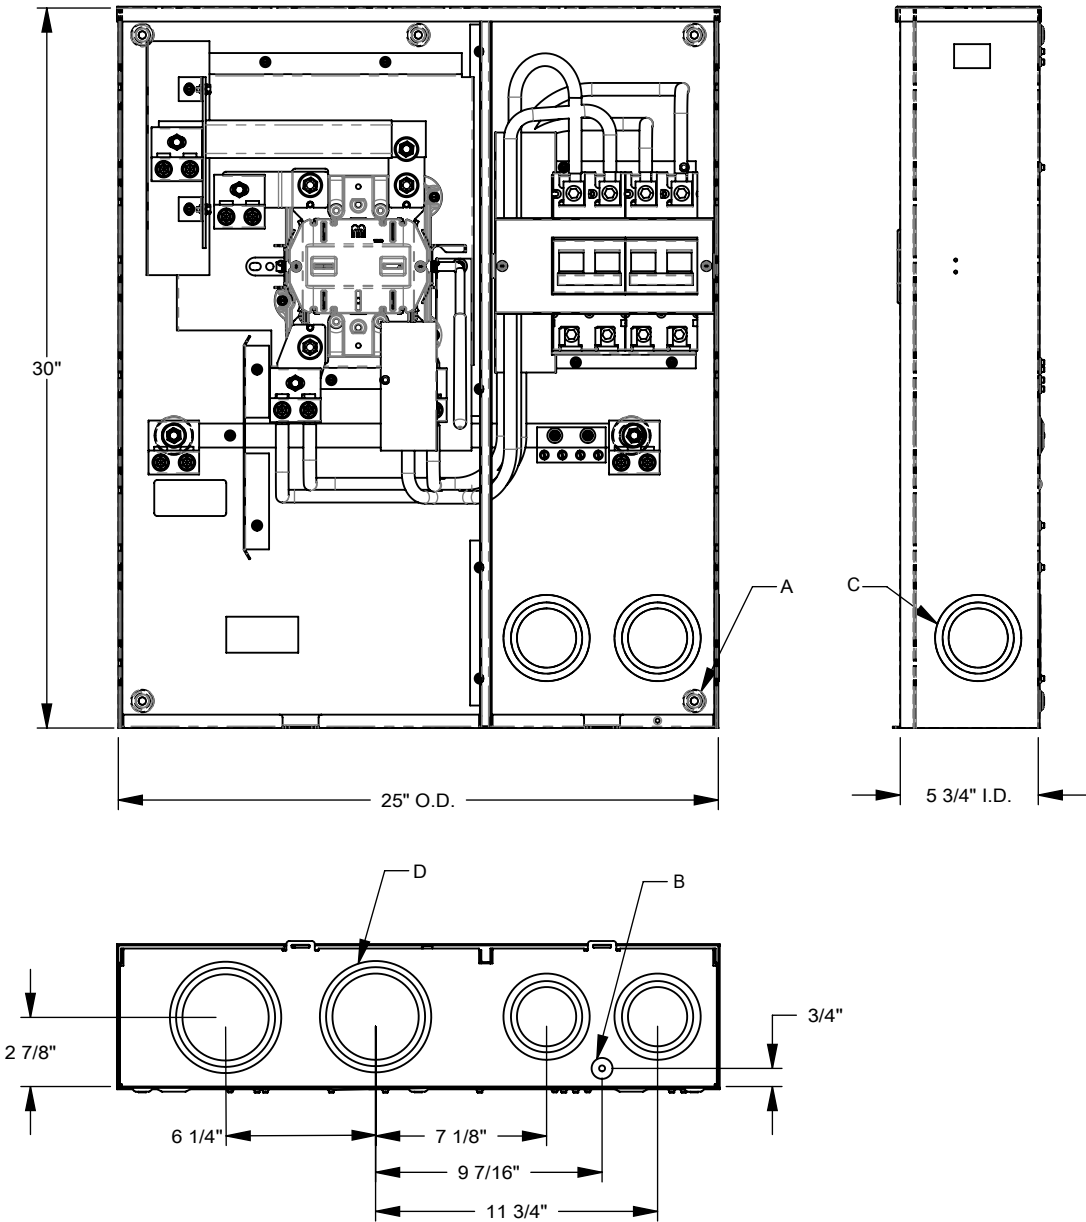

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.
Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.