



Catalog Number 11462
UPC Number 60198611462
Description Nylon Insulated Multi-Stud Ring Terminals
 22-16 AWG




Features

Color Coded insulation for easy identification
 Manufactured from high strength copper alloy
 Electro-tin plated for corrosion resistance
 Expanded Insulation funnel entry eliminates strand "Hang Up", increases the crimping rates and the reliability of the termination
 Wire range stamped on the surface for easy interpretation
 Brazed seam prevent splitting under maximum pressure
 Serrated barrel & flared position of sleeve provides excellent contact & mechanical stress relief at insulation & barrel junction

General

Insulation Type Nylon
Material Copper
Finish Electro-tin plated
Color Red
Wire Range 22-16 AWG
Stud Size #6 #8 #10



Dimension Information

L Inches (mm) 0.996
W Inches (mm) 0.339
D Inches (mm) 0.157
d1 Inches (mm) 0.067
d2 Inches (mm) 0.209
E Inches (mm) 0.433
F Inches (mm) 0.311
T Inches (mm) 0.03

Specifications

Temperature Rating 105°C
Voltage Rating 600 V
Flammability Rating UL94V-O
Amp Rating




22 AWG	9 Amps
20 AWG	12 Amps
18 AWG	17 Amps
16 AWG	18 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications

UL Yes
cUL Yes
RoHS Yes

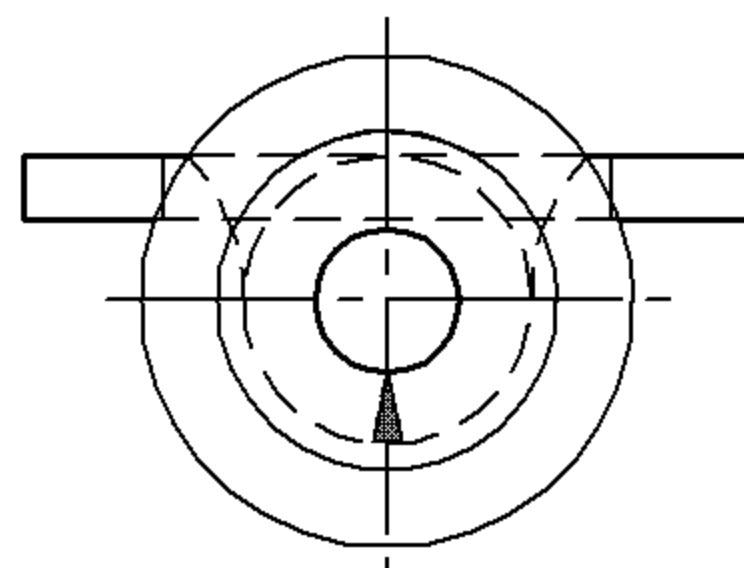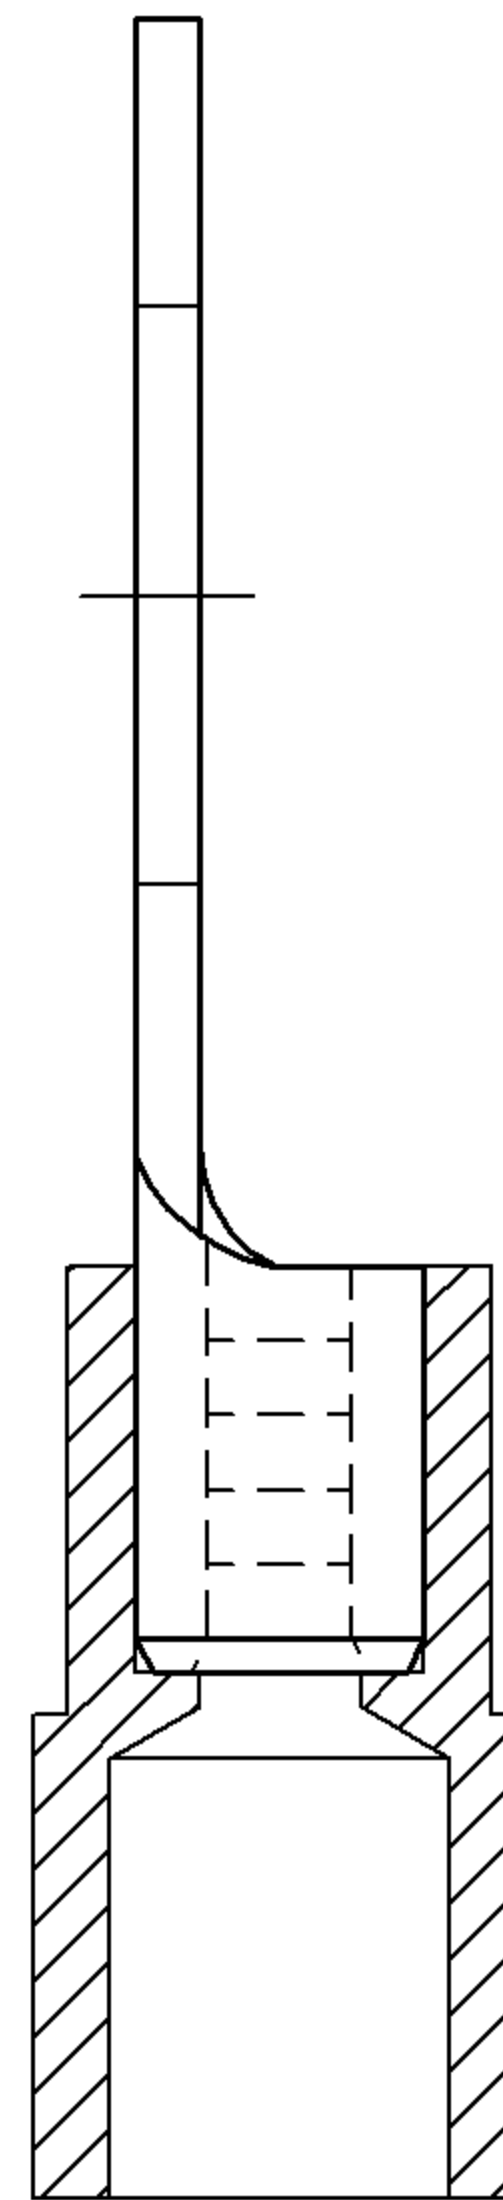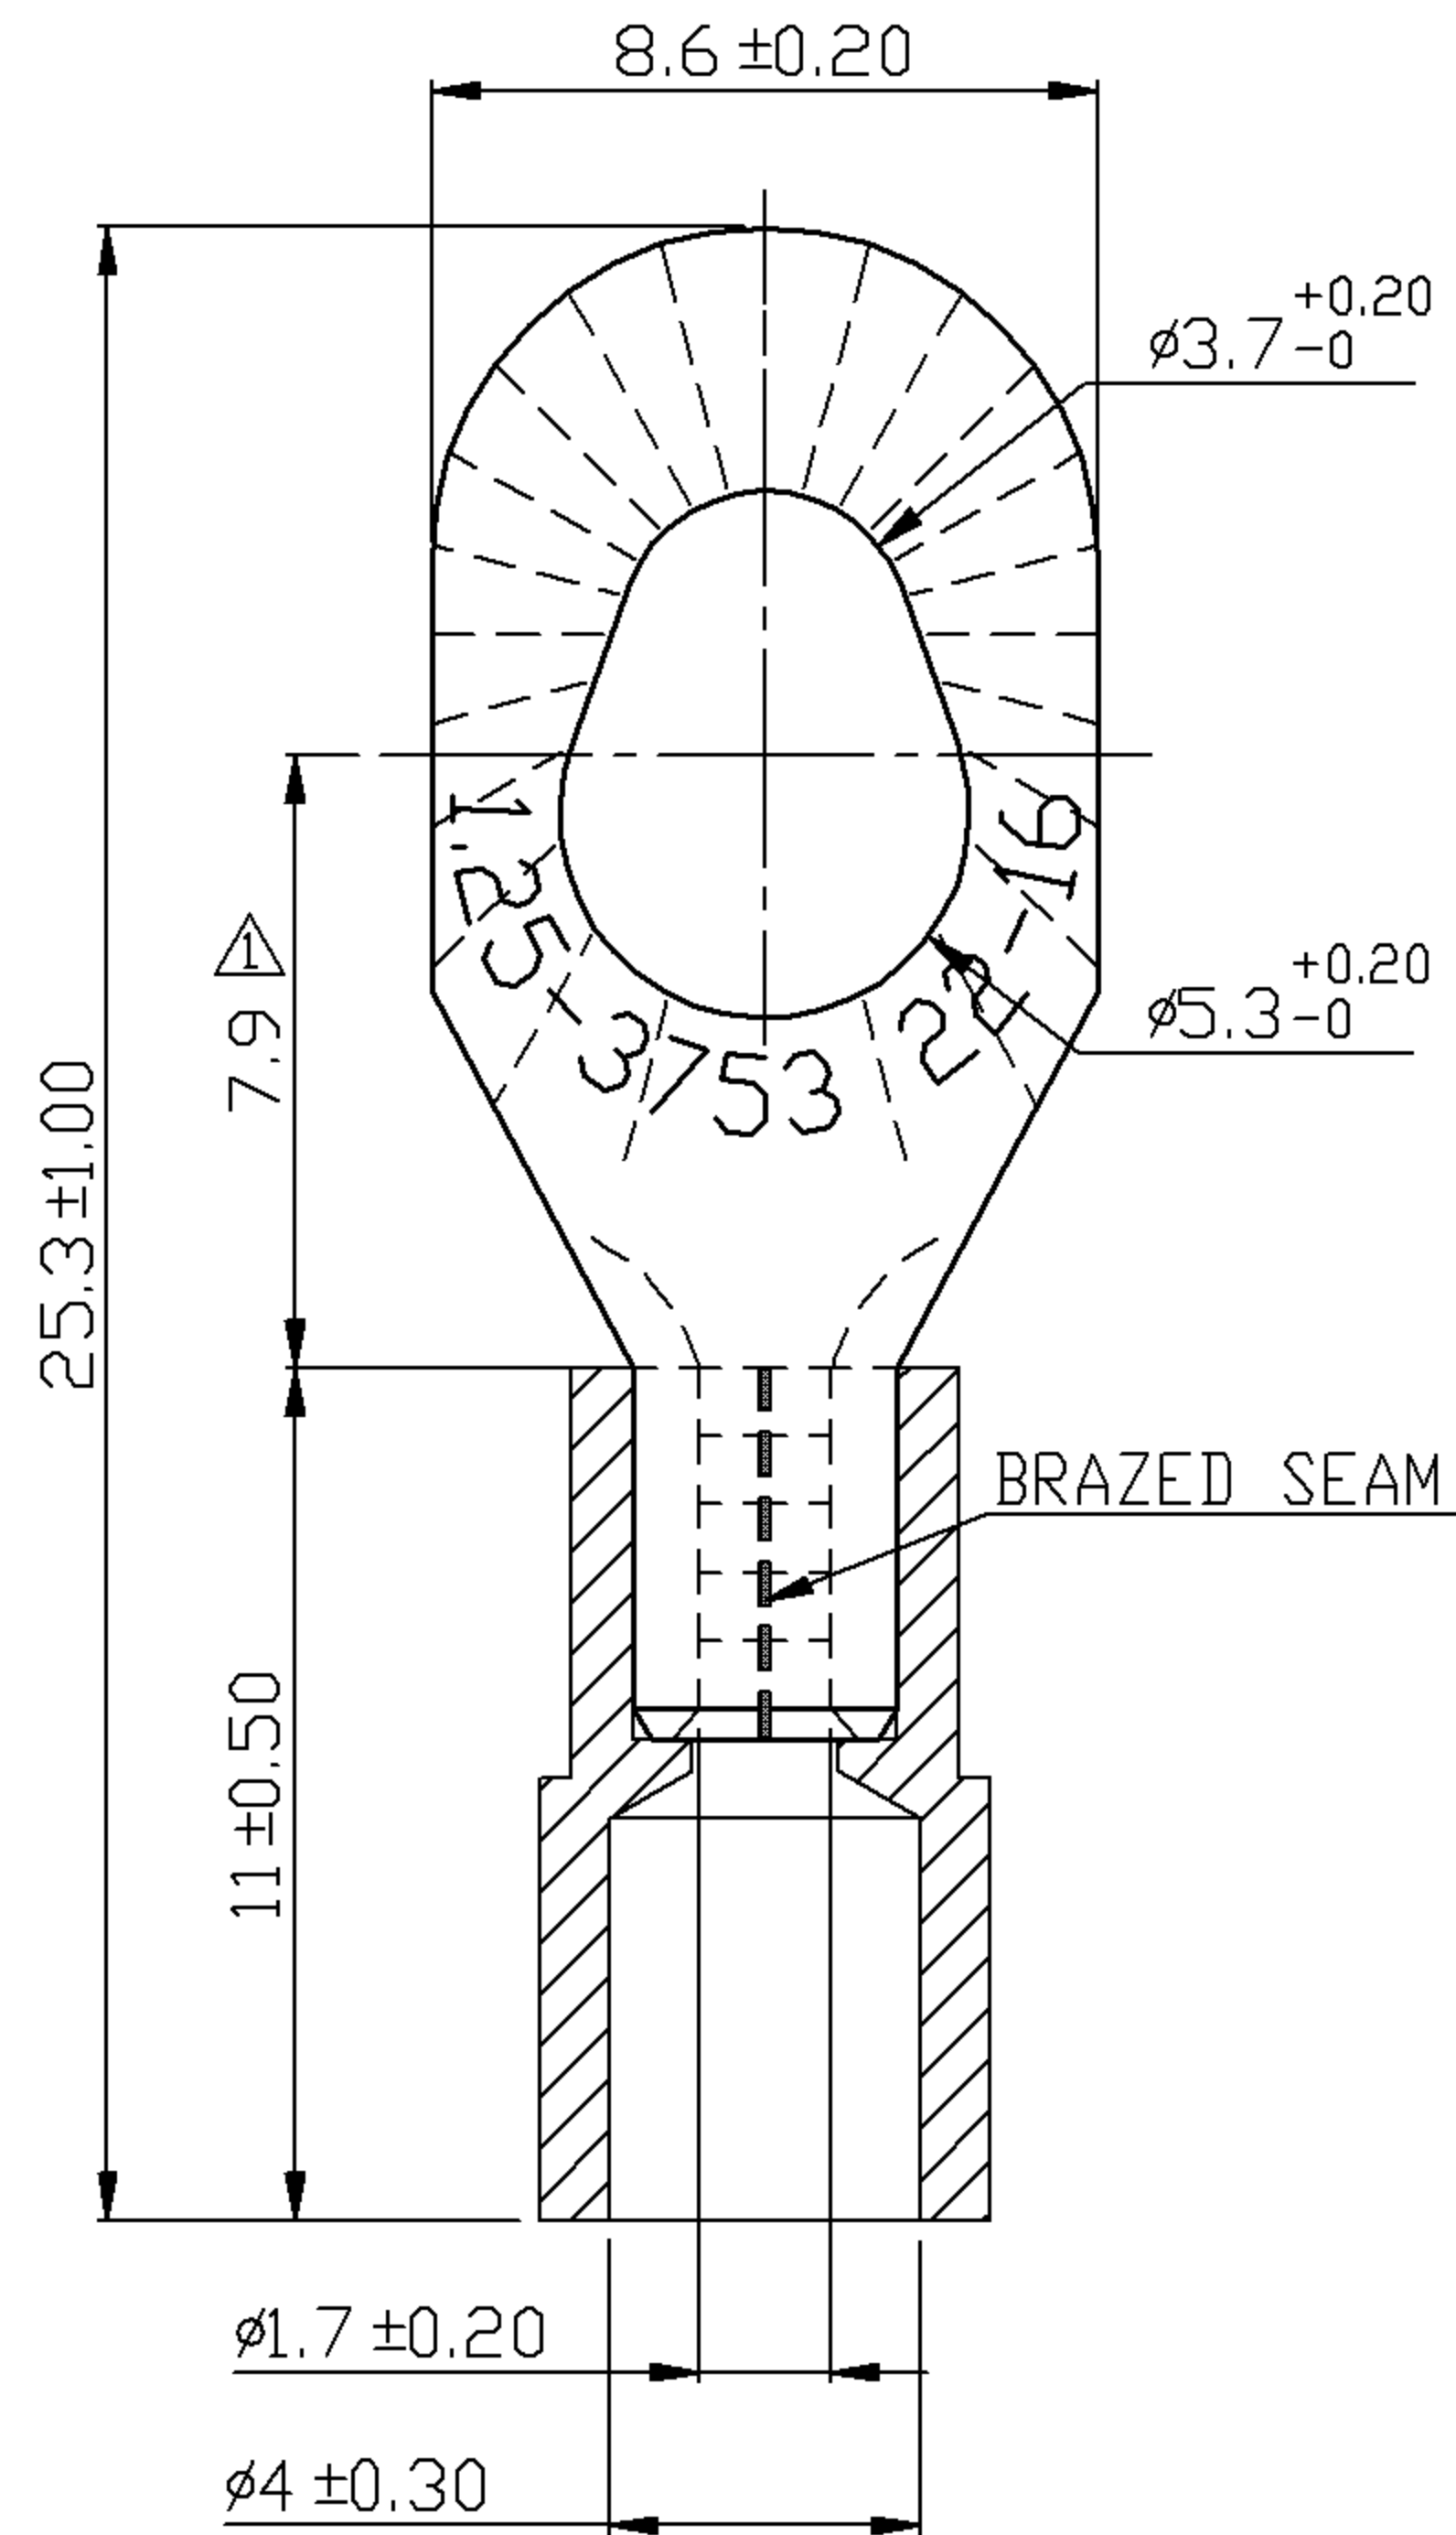

REV	DESCRIPTION	DATE
△	RDK-97127	2009/08/31
△	RDK-98020	2009/08/31

NOTE :

- MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
- MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
- INSULATION MATERIAL : NYLON
- INSULATION COLOR : RED
- TERMINAL MATERIAL : COPPER
- WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
- TERMINAL SURFACE TREATMENT : TIN PLATED
- TERMINAL THICKNESS : 0.75 mm

△	Tolerance Unless Otherwise Specified		
0 >	mm ±	ANGLE	
>	mm ±	0°	° REF ±
>	mm ±	°	° ±
>	mm ±	°	° ±

NAME	NYLON-INSULATED MULTIPLE-STUD RING TERMINALS				UNIT	mm	
PART NO.	11462	MATERIAL	-----		APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED		
DATE	2006/05/29	4/1	1-2	10F2	DRAWN		

Morris Products Inc.

53 Carey Rd Queensbury, NY 12804