

Catalog Number: UC7449-XL

Item Description: 20A 13T RL TS PROV OU

UPC Code: 784572145351

Brand Name: Milbank

Type: Ringless Meter Socket

Application: Meter Socket

Standard: UL Listed

Voltage Rating: 600 Volts Alternating Current

Amperage Rating: 20 Ampere Continuous

Phase: 3 Phase

Frequency Rating: 60 Hertz

Cable Entry: Overhead and Underground

Terminal: Single Mechanical Line Side and Single

Mechanical Load Side

Mounting: Surface Mount

Enclosure: Type 3R, G90 Galvanized Steel with

Powder Coat Finish

Additional Specifications: Line Side Wire Range:12 - 10 AWG

Load Side Wire Range: 12 - 10 AWG

AIC or SCCR Rating: Please Contact Factory

Maximum Amperage:20 Maximum Ampere

Number of Jaws:13 Terminal


Hub Opening and Closing Plates: Small Closing Plate


Bypass Provision: No Bypass

Number Positions: 1 Position



FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	4	STD. MNTG. EMBOSS
В	1	14, 1/2 CONC. K.O.
С	3	1/4, 1/2, 3/4, 1, 11/4 CONC. K.O.
D	3	½, ¾, 1, 1¼ CONC. K.O.

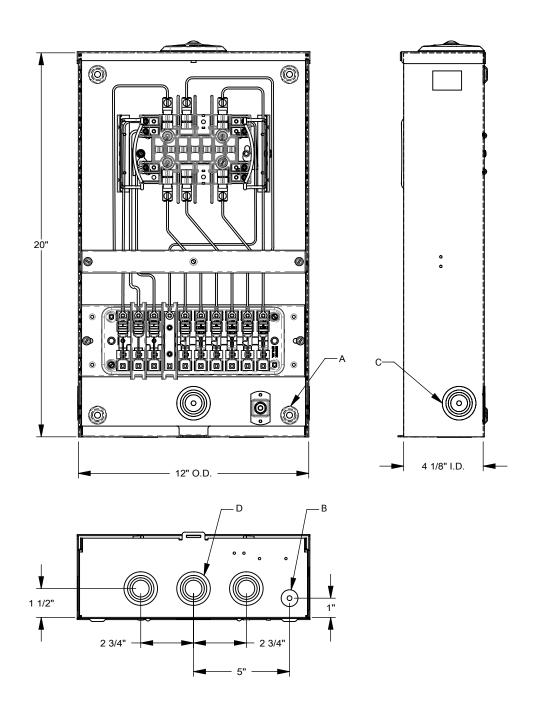

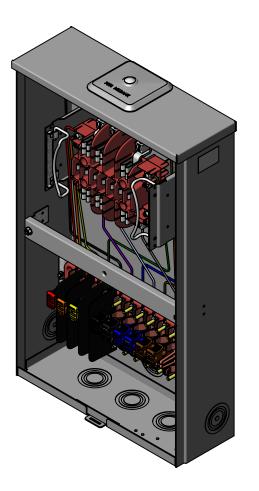



Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.