


Slim-Line Flood/Wallpack Gen 3




Internal Hinge 0-90° Tilt Adjustment

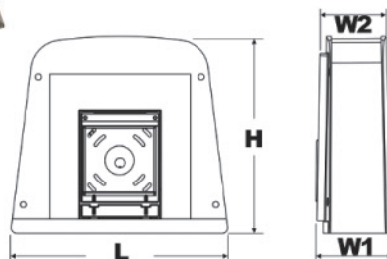

- Hinged Bracket - 0-90° Angle Tilt Adjustment
- Lumileds 3030 LED Array
- Integral Cooling Fin Releases the Heat Efficiently
- Corrosion Resistant Die Cast Aluminum Housing
- Polycarbonate Lens
- Superior Architectural Bronze Powder Coat Finish
- Stainless Steel Hardware
- 4 Standard Knockouts in Junction Box
- CRI: >83
- R9: 11
- THD: 9.58%@120V; 12.33%@ 277V
- Color Temp: 5000K
- Beam Angle: 94°
- cULus listed for Wet Locations
- DLC Listed (Orientation: Straight Down)
- 71327 - No Internal Adjustable Hinge
- 71327 - Junction Box is not Included
Order 71320 Junction Box Separately
- 5 Year Warranty

FLOOD LIGHTING



71160
1/2" Knuckle



71161
Yoke (Bracket)



71398
Slipfitter



71397
Bracket/Trunnion



71320
Junction Box for 71327



71329
Slipfitter for 71327

Cat No.	Watts	Housing Color	Delivered Lumens	Replaces Metal Halide	Length	Height	Depth (W1)	Depth (W2)	Weight (Lbs)	Case Qty
71150	12	Bronze	1,321	60W	5"	6"	3-3/8"	3-3/16"	3	8
71151	12	White	1,321	60W	5"	6"	3-3/8"	3-3/16"	3	8
71152	30	Bronze	3,298	100W	7-5/8"	11"	4-1/2"	4-3/8"	7	4
71153	30	White	3,298	100W	7-5/8"	11"	4-1/2"	4-3/8"	7	4
71154	50	Bronze	5,287	150W	7-5/8"	11"	4-1/2"	2-3/8"	7	4
71155	50	White	5,287	150W	7-5/8"	11"	4-1/2"	2-3/8"	7	4
71156	80	Bronze	9,241	250W	11"	13"	5-1/2"	5-3/8"	11	2
71157	80	White	9,241	250W	11"	13"	5-1/2"	5-3/8"	11	2
71158	120	Bronze	14,227	400W	11"	13"	5-1/2"	5-3/8"	11	2
71159	120	White	14,227	400W	11"	13"	5-1/2"	5-3/8"	11	2
71327	153	Bronze	12,500	400W	14-1/4"	12-3/4"	4-7/8"	3-7/8"	12	1

Mounting Accessories

71160	1/2" Adjustable Knuckle for 30W & 50W Slim-Line Fixtures	1	30
71161	Yoke (Bracket) for 30W & 50W Slim-Line Fixtures	1	30
71397	Trunnion for 80W & 120W Slim-Line Fixtures	2	10
71398	2-3/8" Slipfitter for 80W & 120W Slim-Line Fixtures	3	5
71320	Optional Junction Box for 153W Slim-Line Fixture	2	12
71329	2-3/8" Slipfitter for 153W Slim-Line Fixture	7	12