



Linear Vapor Tight

40 WATT 5000K 120-277V



Features:

0-10V Dimming

Polycarbonate Lens with high flame retardant paint


Polycarbonate Housing & Clips

High Quality LED chips provide high efficiency

Surface Mount Brackets Included


50,000+ Hour LED Life Expectancy

IP65 Wet Location Rated

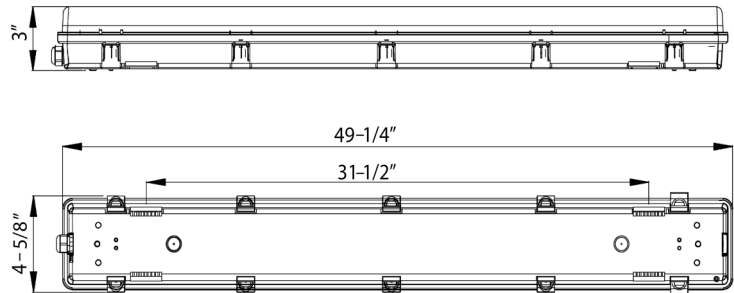

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Light Pattern	Input Current @ 120V	Lumens/Watt	DLC#
71901	White	40	5000	5000	120-277	109° x 136°	0.35A	125	PXKSBVVP

PHOTOMETRY

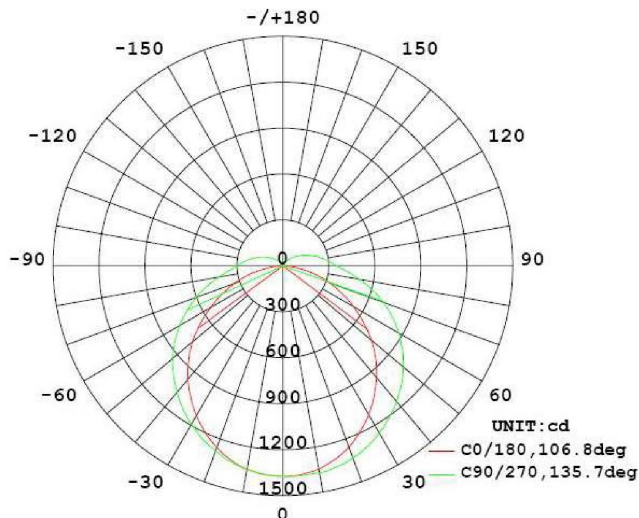



Linear Vapor Tight

40 WATT 5000K 120-277V

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .0.34A @ 120V

Frequency: 60Hz

Power Factor: ≥ 0.99

THD: 18% @ 120V

Product Parameters:

40 Watts

Efficacy: 125 lumens per watt

50,000+ LED Life Span

CCT: 5000k (Cool White)

Dimming: 0-10V

Chromaticity Measurements:

Beam Angle: 109° x 136°

BUG Rating: B2-U5-G1

CRI: >82

R9: 8

DUV: .0014

Chromaticity (x,y): x=.4419; y= .4093

Chromaticity (u,v): u=.2515; v= .5242

Component Specifications:

LED: SMD 2835

Driver: 100-277V 50-60HZ

Driver Output Volts: 40-45V

Driver Output Amps: 800mA

Surge Protection Volts: 4000

Dimming: 0-10V

Operating Temperature:

Minimum Starting -22°F - 104°F

Construction:

Housing: Polycarbonate Housing and Clasps

White Finish

IP Rating: IP65 Wet Location

Lens Material: Polycarbonate Lens

Mounting: Surface Mount Brackets Included

Listings: UL Listed: E474299

DLC#: PXKSBVVP

Carton Qty: 6

Weight: 3.5 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).