



Catalog Number 11128
UPC Number 60198611128
Description Non-Insulated Ring Terminals
 2 AWG



Features


- Non-Insulated
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Brazed seam prevents splitting under maximum pressure
- Wire range stamped on the surface for easy interpretation

General

Insulation Type None
Material Copper
Finish Electro-tin plated
Color N/A
Wire Range 2 AWG
Stud Size 1/2

Dimension Information

L Inches (mm) 1.681
W Inches (mm) 0.866
D Inches (mm) 0.524
d1 Inches (mm) 0.37
d2 Inches (mm) 0.512
E Inches (mm) 0.551
F Inches (mm) 0.697
T Inches (mm) 0.071



Specifications

Temperature Rating 150°C
Voltage Rating 600 V
Flammability Rating N/A
Amp Rating 2 AWG 170 Amps

Packaging




Bag Qty 100
Master Bag Qty 1000

Certifications

UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

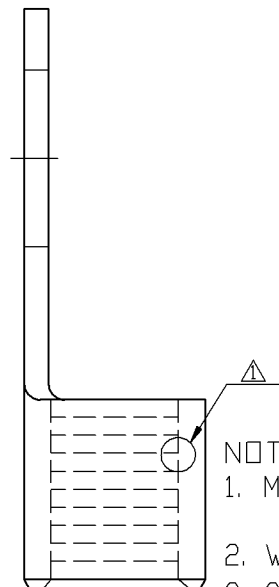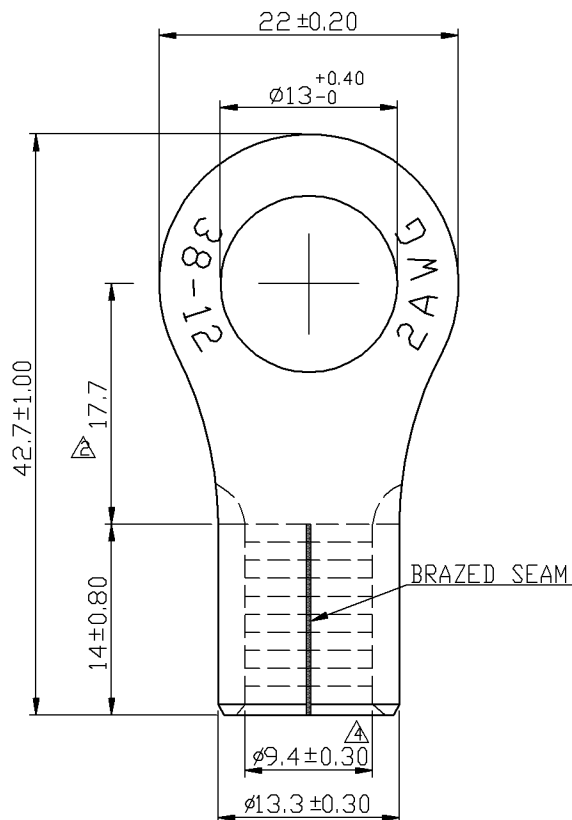

REV	DESCRIPTION	DATE
△	RDC-96268	2007/08/09
△	RDK-97132	2008/07/11
△	RDK-98020	2009/09/18
△	RDC-99169	2010/05/04

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	2		
AMP.	170		
2. WIRE RANGE : 2 A.W.G. (38 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.80 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0° >	° REF ±
>	mm ±	° >	° ±
>	mm ±	° >	° ±

NAME	NON-INSULATED RING TERMINALS			UNIT	8 B	
PART NO.	11128	MATERIAL	COPPER	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/04/20	2/1	1-4	10F2	DRAWN	

Morris Products Inc.