


Gimbal Recessed Lighting Retrofit Kit




DOWN LIGHTING

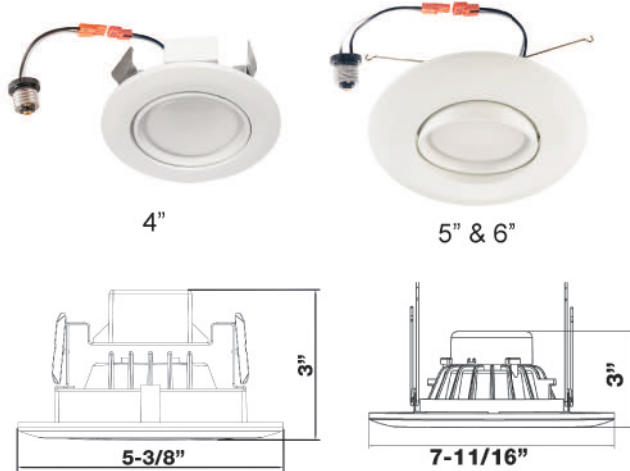

- LED Gimbal EYE Retrofit Kits for Recessed Downlighting
- Adjustable Gimbal Lens
- Can be Installed in Most 4", 5" & 6" Downlights
- Aluminum Housing/Trim - Paintable
- Simple Screw-In Installation
- In-Line Pluggable Disconnect Included
- Guaranteed Single Bin Color Consistency with Enhanced Illumination Uniformity
- TRIAC Dimming Technology
- Dimmable Down to 10%
- Compatible with most LED Dimmers
- Beam Angle: 94°
- Input Voltage: 120VAC
- Operating Temperature: -31°F to 122°F
- 50,000+ Hour LED Life Expectancy
- IP43 Damp Location Rated
- IC (Insulation Contact) Rated
- 5 Year Warranty

Cat. No.	Size	Watts	Color Temp	Delivered Lumens	CRI	Replaces Incandescent	Case Qty
72620	4"	10	3000K	800	92	65W	12
72621	4"	10	4000K	800	92	65W	12
72623	5" & 6"	15	3000K	1040	91	75W	12
72624	5" & 6"	15	4000K	1040	91	75W	12
72625	5" & 6"	15	5000K	1040	91	75W	12

Square Recessed Lighting Retrofit Kit

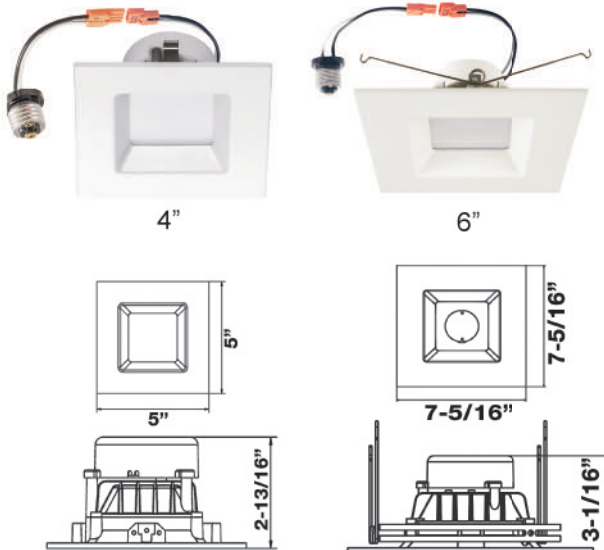

- LED Square Trim Retrofit Kits for Recessed Downlighting
- Can be installed in Most 4" & 6" Downlights
- Aluminum Housing/Trim - Paintable
- Simple Screw-In Installation
- In-Line Pluggable Disconnect Included
- Guaranteed Single Bin Color Consistency with Enhanced Illumination Uniformity
- TRIAC Dimming Technology
- Dimmable Down to 10%
- Compatible with most LED dimmers
- Beam Angle: 4" (88)°; 6" (107)°
- Input Voltage: 120VAC
- Operating Temperature: -31°F to 122°F
- 50,000+ Hour LED Life Expectancy
- IP44 Wet Location Rated
- IC (Insulation Contact) Rated
- 5 Year Warranty

Cat. No.	Size	Watts	Color Temp	Delivered Lumens	CRI	Replaces Incandescent	Case Qty
72632	4"	10	3000K	600	92	65W	12
72634	4"	10	4000K	600	92	65W	12
72635	6"	15	3000K	971	90	75W	12
72636	6"	15	4000K	971	90	75W	12
72637	6"	15	5000K	971	90	75W	12