



Catalog Number	11110
UPC Number	60198611110
Description	Non-Insulated Ring Terminals 4 AWG



Features


- Non-Insulated
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Brazed seam prevents splitting under maximum pressure
- Wire range stamped on the surface for easy interpretation

General

Insulation Type	None
Material	Copper
Finish	Electro-tin plated
Color	N/A
Wire Range	4 AWG
Stud Size	5/16

Dimension Information

L Inches (mm)	1.319
W Inches (mm)	0.65
D Inches (mm)	0.453
d1 Inches (mm)	0.303
d2 Inches (mm)	0.331
E Inches (mm)	0.472
F Inches (mm)	0.531
T Inches (mm)	0.067



Specifications

Temperature Rating	150°C
Voltage Rating	600 V
Flammability Rating	N/A
Amp Rating	4 AWG 125 Amps

Packaging


Bag Qty	100
Master Bag Qty	1000

Certifications

UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

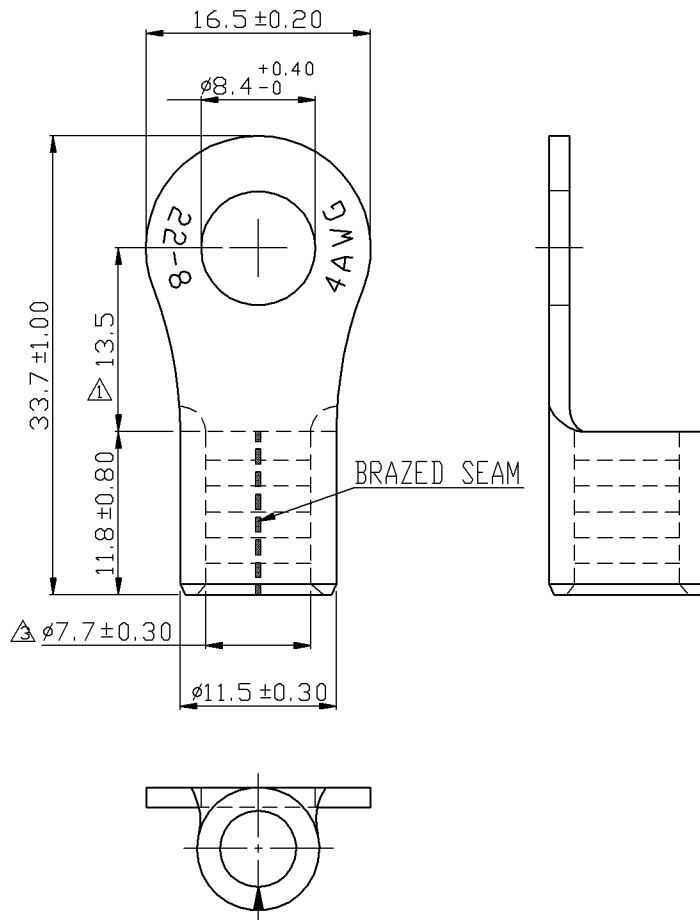

REV	DESCRIPTION	DATE
△	RDK-97127	2008/07/09
△	RDK-98020	2009/09/18
△	RDC-99171	2010/04/29

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	4		
AMP.	125		
2. WIRE RANGE : 4 A.W.G. (22 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.70 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0°	REF ±
>	mm ±	°	±
>	mm ±	°	±

NAME	NON-INSULATED RING TERMINALS			UNIT	mm	
PART NO.	11110	MATERIAL	COPPER	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/09/19	2/1	1-3	10F2	DRAWN	

Morris Products Inc.