

## Heat Stabilized Nylon Cable Ties



- ▶ For High Temperature Applications up to 221°F
- ▶ One-Piece Construction
- ▶ Made from UL approved Nylon 6/6
- ▶ Flammability Rating: UL 94V-2
- ▶ Temperature Rating: -40°F to 221°F

Dimensions = Inches

Cat. No.	Tensile Strength (Lbs)	Length	Width	Max Bundle Dia	Bag Qty	Master Bag Qty
20802	18	4	.077	.87	100	1000
20804	50	8	.126	2.09	100	1000
20806	50	11	.189	3.03	100	1000
20808	50	14-1/2	.189	4.13	100	1000

## Flame Retardant Nylon Cable Ties




- ▶ Flame Retardant Self Extinguishing Properties
- ▶ Flammability rating: UL 94V-0
- ▶ One-Piece Construction
- ▶ Made from UL approved Nylon 6/6
- ▶ Temperature rating: -40°F to 185°F

Dimensions = Inches

Cat. No.	Tensile Strength (Lbs)	Length	Width	Max Bundle Dia	Bag Qty	Master Bag Qty
20812	18	4	.098	.87	100	1000
20814	50	8	.181	2.05	100	1000
20816	50	11	.189	3.03	100	1000
20818	50	14-1/2	.189	4.13	100	1000

## Tefzel Cable Ties For Plenum Areas

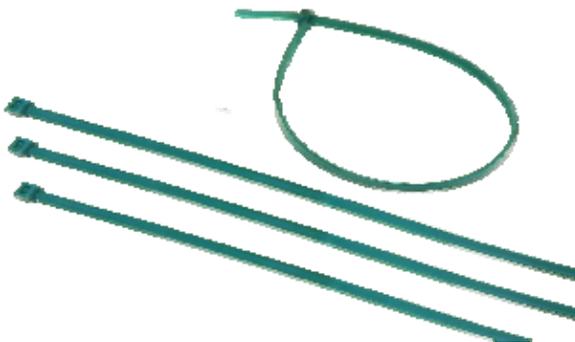

- ▶ Can be used in Severe Environments including Acidic Areas, Extreme Temperatures & High Energy Radiation Exposure
- ▶ Suitable for Bundling Cables in Plenum Areas
- ▶ Manufactured from Fluoropolymer Materials
- ▶ Aqua blue-green color
- ▶ Tefzel will not burn in Air, but it will burn in oxygen-enriched environments
- ▶ The limiting oxygen index (LOI) as measured by the "Candle Test" (ASTM D2862) is 30%
- ▶ Tefzel is rated 94V-0 by Underwriters Laboratories Inc. burn test classification for polymeric materials
- ▶ Temperature rated -45°F to 302°F (-43°C to 150°C)

Dimensions = Inches

Cat. No.	Tensile Strength (Lbs)	Length	Width	Bag Qty	Master Bag Qty
20902	18	3.75"	.09"	100	100
20906	50	7.25"	.19"	100	100
20910	50	14.25"	.19"	100	100