




Catalog Number	90572
UPC Number	60198690572
Description	Copper Lay-In Connector Direct Burial



Features

- Manufactured from High Strength High Conductivity Copper Alloy
- Stainless Steel Set Screws
- Open Face Lay-In Design
- Direct Burial Rated
- Pool, Equipment, Ground Grid, Conduit Ground, Solar

General

Material	Pure Electrolytic Copper
Screw Type	Stainless Steel
Screw Size	.26"
Wire Range	#14 awg - #4 awg

Dimension Information

Stock Thickness	
Length:	.78"
Height:	1.08"
Width:	.38"

Specifications


Temperature Rating	
Voltage Rating	600
Flammability Rating	
Amp Rating	

Packaging

Box Qty	100
---------	-----

Certifications

UL	467D Direct Burial Listed
CSA	Yes
RoHS	N/A

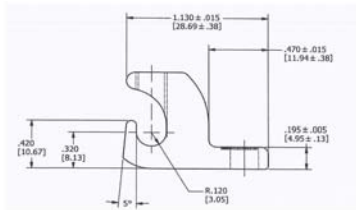

1/4-28 UNF - 2B x .57 DP. REF.

Ø.221 THRU
[Ø5.61]

.190 ± .005
[4.83 ± .13]

.380 ± .007
[9.65 ± .18]

.200 ± .005
[5.07 ± .13]

.190 ± .015
[4.83 ± .38]

1.130 ± .015
[28.69 ± .38]

.470 ± .015
[11.94 ± .38]

.195 ± .005
[4.95 ± .13]

.850
[21.59]

.420
[10.67]

.320
[8.13]

5°

R.120
[3.05]

△ TAP WITHIN .090 [2.29] MAX.
OF BOTTOM OF WIREWAY. DO
NOT DRILL PAST WIREWAY.

1/4-28 x .625 LG. SLOTTED
18-8 STAINLESS STEEL SCREW
C00201027 (1 REQ'D)
ASSEMBLE SCREW SNUG
TO BOTTOM

ASN. NO. C00497245
PART NO. C00209245
BLANK NO. C00029245
QUOTE NO.

FINISH: CLEAN ONLY

UNLESS
OTHERWISE SPECIFIED
.00 = ± .015
.000 = ± .005
ANGLES = ± 1/2°
[X] = DIMENSION IN
MILLIMETERS

DRAWN BY: MDC NAME OF PART:

2/22/1994

LAY-IN ASSEMBLY

CAT. NO.:

90572

CHECKED BY: BHS

MATERIAL:
C13602001

5/2/2011

CDA-147 COPPER

A

[X] = DIMENSION IN
MILLIMETERS

CROSS REFERENCE # -

SCALE: 2:1

REV. H REDRAWN IN INVENTOR; REMOVED "SERRATIONS
OPTIONAL" NOTE

DESCRIPTION

ECN

DATE

INIT.

BHS

Morris Products Queensbury NY

