
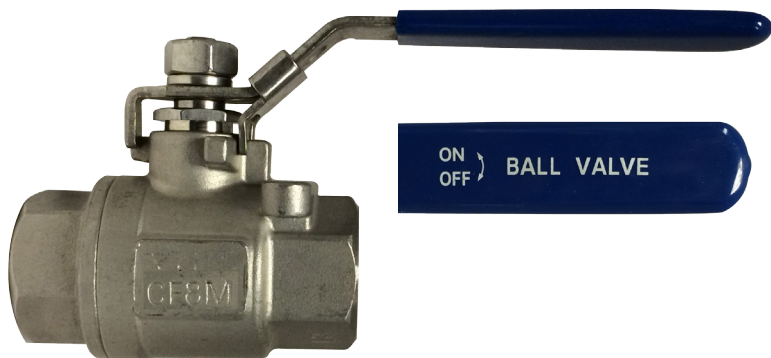
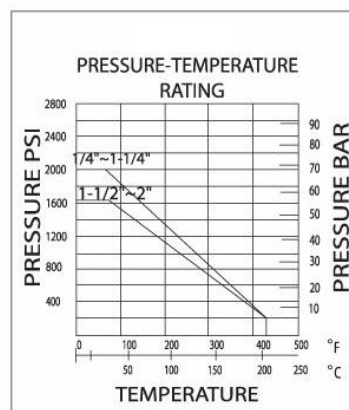


**316 SS 2-PC BALL VALVE, FULL PORT, THREADED END, 2000 PSI**

- Investment Castings for body and cap.
- Internal Entry blow-out proof stem.
- Pressure rating: 2000PSI.
- Threaded Ends: ANSI B2,1
- Material: CF8M (316SS)
- Pressure test: API 598
- Generic Handles

**LOCKING HANDLE**

| Part#   | Size   | D    | L    | H    | W    | N.M  | lbs/ pc | Case | List Price |
|---------|--------|------|------|------|------|------|---------|------|------------|
| 949-171 | 1/4"   | 0.36 | 2.13 | 2.13 | 4.33 | .157 | 0.64    | 80   | 34.14      |
| 949-172 | 3/8"   | 0.50 | 2.13 | 2.16 | 4.33 | .157 | 0.58    | 80   | 34.14      |
| 949-173 | 1/2"   | 0.59 | 2.24 | 2.28 | 4.53 | .197 | 0.71    | 70   | 43.92      |
| 949-174 | 3/4"   | 0.79 | 2.76 | 2.40 | 4.53 | .315 | 1.18    | 50   | 60.48      |
| 949-175 | 1"     | 0.98 | 3.50 | 3.03 | 6.04 | .394 | 2.33    | 30   | 90.72      |
| 949-176 | 1-1/4" | 1.25 | 4.12 | 3.19 | 6.04 | .551 | 3.48    | 20   | 134.64     |
| 949-177 | 1-1/2" | 1.50 | 4.05 | 3.54 | 6.10 | .709 | 4.03    | 14   | 187.32     |
| 949-178 | 2"     | 1.96 | 4.90 | 4.25 | 6.10 | .984 | 7.50    | 7    | 260.46     |

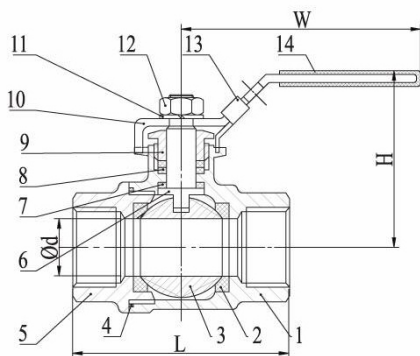

| NO | Part          | Material | QTY |
|----|---------------|----------|-----|
| 1  | BODY          | 316SS    | 1   |
| 2  | BALL SEAT     | PTFE     | 2   |
| 3  | BALL          | 316SS    | 1   |
| 4  | BODY SEAL     | PTFE     | 1   |
| 5  | CAP           | 316SS    | 1   |
| 6  | STEM          | SS316    | 1   |
| 7  | THRUST WASHER | PTFE     | 1   |
| 8  | PACKING       | PTFE     | 1   |
| 9  | GLAND NUT     | SS304    | 1   |
| 10 | HANDLE        | SS304    | 1   |
| 11 | WASHER        | SS304    | 1   |
| 12 | NUT           | SS304    | 1   |
| 13 | LOCK DEVICE   | SS304    | 1   |
| 14 | HANDLE COVER  | PLASTIC  | 1   |