

COMMERCIAL FAN-FORCED WALL HEATERS

SRA SERIES



APPLICATIONS:

Attics
Basements
Entryways
Large Rooms
Offices
Remodels



CONTEMPORARY DESIGN

- Commercial grade steel grille designed to provide a modern sleek appearance and rugged use



UNIFORM DISTRIBUTION OF WARMTH

- Built-in fan delay switch energizes fan motor only after elements are heated, which prevents discharge of unheated air
- Integral double pole thermostat allows for easy adjustment of room temperature to maintain desired comfort level



SAFETY STANDARDS COMPLIANT

- Safety listed by Intertek (ETL) for use in the USA and Canada complying with ANSI/UL2021 and C22.2, No. 56 safety standards.
- Manual-reset thermal overheat protector disconnects power in the event of overheating due to accidental blockage




DURABLE AND EASY MAINTENANCE

- All units have a permanently lubricated fan motor, which creates long life and low maintenance, and gently distributes warmth throughout the area
- Built-in ON/OFF switch for added safety during maintenance

| Model # | Voltage | Amps | Watts | BTU/HR | Wire Size |
|--------------------|--|----------|-----------|-----------|-----------|
| SRA1012DSF | 120 | 8.4/4.2 | 1000/500 | 3413/1706 | 14AWG |
| SRA1512DSF | 120 | 12.5/6.3 | 1500/750 | 5120/2560 | 12AWG |
| SRA1812DSF | 120 | 15.0/7.5 | 1800/900 | 6143/3072 | 12AWG |
| SRA2024DSF | 240 | 8.4/4.2 | 2000/1000 | 6826/3413 | 14AWG |
| | 208 | 7.3/3.6 | 1500/750 | 5120/2560 | 14AWG |
| SRA2027DSF | 277 | 7.3/3.6 | 2000/1000 | 6826/3413 | 14AWG |
| | 240 | 6.3/3.2 | 1500/750 | 5120/2560 | 14AWG |
| SRA1527DSF | 277 | 5.5/2.75 | 1500/750 | 5120/2560 | 14AWG |
| | 240 | 4.7/2.4 | 1125/562 | 3840/1920 | 14AWG |
| SRA2020DSF | 208 | 9.6/4.8 | 2000/1000 | 6826/3413 | 14AWG |
| Accessories | | | | | |
| SRASM | Surface Mounting Frame (Accessory) Order Separately 12-1/2" (318mm)H X 10-3/8" (264mm)W X 4" (102mm) in northern white | | | | |
| SRAS1 | 1" (25mm) Recess Mounting Frame (Accessory) Order Separately in northern white | | | | |
| SRAS2 | 2" (50mm) Recess Mounting Frame (Accessory) Order Separately in northern white | | | | |
| SRAFCTPF | Tamper-resistant front cover in northern white | | | | |

DIMENSIONS

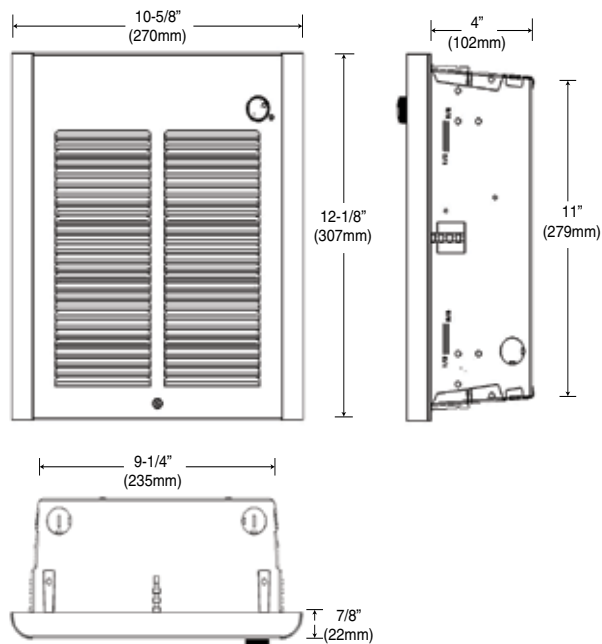

MOUNTING LIMITATIONS

Do not install heater closer than 8" from floor or adjacent wall surface, behind towel rack or door, upside down or side up, in floor, ceiling or closet.

