


Entryway/Walkway Wallmount

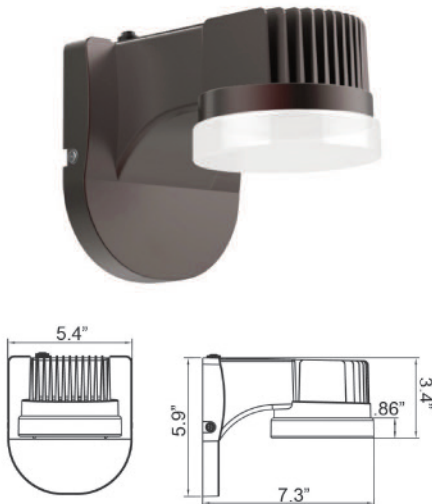

- Cree CXA LEDs
- Full Cutoff
- Includes Morris #39069 Photocell for 120V usage only
- Unit can be used for 120-240V if Photocell is disconnected
- Input Voltage: 120VAC with Photocell
- Integral Cooling Fin Releases the Heat Efficiently
- Corrosion Resistant Die Cast Aluminum Housing
- Anti-Glare Polycarbonate Frosted Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel Hardware
- CRI: 72+
- Light Pattern: 120° Beam Angle
- Operating Temperature: -22°F to 104°F
- 50,000+ Hour LED Life Expectancy
- Weight: 5 Lbs
- IP65 (NEMA 4X) Dust & Water Tight
- cULus listed for Wet Locations
- 5 Year Warranty

Cat. No.	Color	Watts	Color Temperature	Delivered Lumens	Replace Metal Halide	Length	Width	Height	Case Qty
71299	Bronze	14	3000K Warm White	750	50W	7-1/4"	5-3/8"	5-7/8"	6
71300	Bronze	14	5000K Cool White	750	50W	7-1/4"	5-3/8"	5-7/8"	6
71301	White	14	3000K Warm White	750	50W	7-1/4"	5-3/8"	5-7/8"	6

Ornamental Entryway Lights




Fig 1



Fig 2



Fig 3

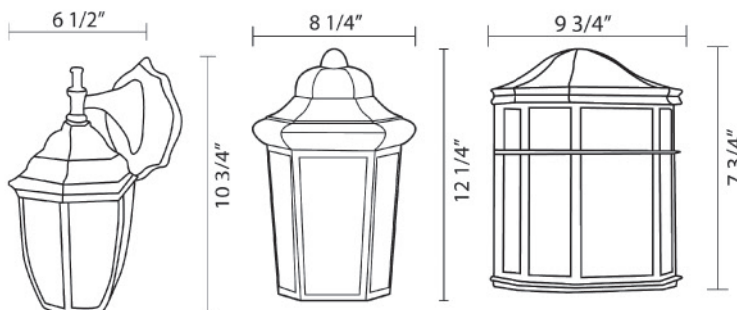

- Classic Ornamental Entryway Lighting
- Die Cast Aluminum Base/Frame
- IP53 Rated (NEMA 3) Dust & Water Tight
- Color: Black
- Frosted Polycarbonate Lens
- CRI: >80
- Color Temperature: 4000K
- Power Factor: > .90
- 35,000+ Hour Life Expectancy
- Input Voltage: 120 VAC
- ETL Listed
- Photocell Not Included
- 5 Year Warranty

Cat. No.	Fig	Photocell	Watts	Housing Color	Color Temp	Delivered Lumens	Replaces Metal Halide	Beam Angle	Order In Case Qty
Traditional Conical Lens - No Photocell									
72130	1	No	6	Black	4000K	400	50W	110°	6
72134	2	No	9	Black	4000K	630	75W	110°	6
72140	3	No	9	Black	4000K	650	75W	96°	6