

Linear VaporTight




- 4' LED Linear Vaportight Fixture
- Vandal Resistant
- Industrial, Commercial, Garage
- Wall, Ceiling or Suspension Mount
- Surface Mounting Brackets included
- SMD 2835 LEDs
- 0-10V Dimmable
- CRI: >80
- Beam Angle: H: 109° V: 136°
- Input Current: .35A
- Input Voltage: 120-277 VAC
- Operating Temperature: -22°F to 104°F
- Polycarbonate Housing & clasps
- Polycarbonate Diffused Lens
- 50,000+ Hour LED Life Expectancy
- IP65 Wet Location Rated
- 5 Year Warranty



Cat. No.	Length	Color Temp	Watts	Delivered Lumens	CRI	Replaces Fluorescent	Order In Case Qty
71901	4'	5000K	40	5000	80	64-128W	6
71902	4'	4000K	40	5000	80	64-128W	6

VaporTight Jelly Jars

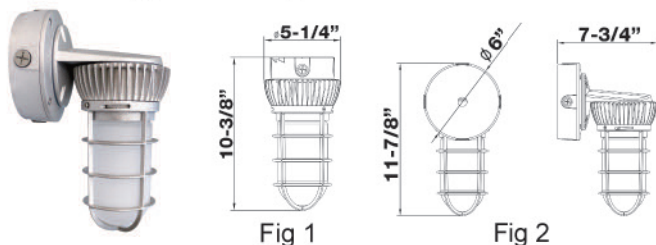


- COB LEDs
- Die Cast Aluminum Housing - Silver Finish
- High Impact Heat Resistant Frosted Glass Lens
- 2 Threaded Apertures - (2)Sides
- Operation Temperature: -40°F to 131°F
- Light Pattern: 175° Beam Angle 7H X 7V
- Color Temperature: 5000K Cool White
- Input Voltage: 120/208/240/277VAC
- IP54 (NEMA 3) Dust & Water Tight
- 50,000+ Hour LED Life Expectancy
- 5 Year Warranty



Cat. No.	Fig	Watts	Delivered Lumens	Replace Metal Halide	Weight (Lbs)	Case Qty
Ceiling Mount						
72105	1	10	845	50W	6	4
72107	1	20	1,721	100W	6	4
Wall Mount						
72106	2	10	845	50W	6.5	2
72108	2	20	1,721	100W	6.5	2

Linear Shoplight

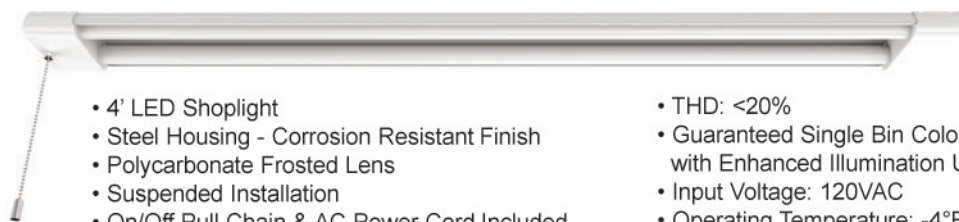

- 4' LED Shoplight
- Steel Housing - Corrosion Resistant Finish
- Polycarbonate Frosted Lens
- Suspended Installation
- On/Off Pull Chain & AC Power Cord Included
- Beam Spread: 141° x 124°
- SCDM: <6
- CRI: 85
- PF: .95

- THD: <20%
- Guaranteed Single Bin Color Consistency with Enhanced Illumination Uniformity
- Input Voltage: 120VAC
- Operating Temperature: -4°F to 120°F
- 50,000+ Hour LED Life Expectancy
- Damp Location Rated
- 5 year Warranty

Cat. No.	Length	Color Temp	Watts	Delivered Lumens	CRI	Replaces Fluorescent	Order In Case Qty
71946	4'	5000K	40	4400	85	64-128W	4