

Bronze Ball Valves

Two-Piece Body • Full Port • 316SS Trim • Blowout-Proof Stem •
ISO Direct-Mount Pad for Actuation • Vented Ball

600 PSI/41.4 Bar Non-Shock Cold Working Pressure
150 PSI/10.3 Bar Saturated Steam*

CONFORMS TO MSS SP-110 •
ACTUATOR MOUNT PER ISO 5211



MATERIAL LIST

PART	SPECIFICATION
1. Stem	Stainless Steel ASTM A 276 Type 316
2. O-Ring (2)	Fluoroelastomer
3. Thrust Washer	Reinforced PTFE
4. Seat Ring (2)	Carbon Filled PTFE
5. Ball (Vented)	Stainless Steel ASTM A 276 Type 316 or ASTM A 351 Type CF8M
6. Body	Bronze ASTM B 584 Alloy C84400
7. Body End Piece	Bronze ASTM B 584 Alloy C84400



TM-585-70-66

Threaded
with Mounting Pads

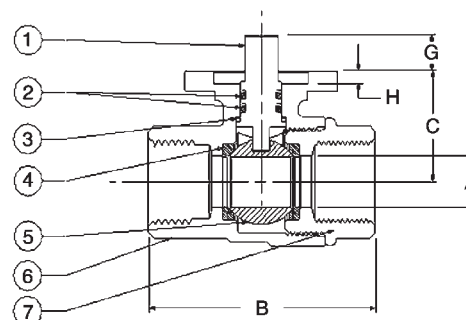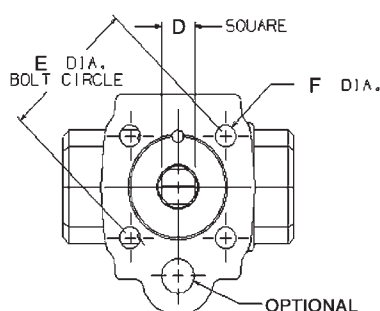

TM-585-70-66
NPT x NPT

DIMENSIONS—WEIGHTS—QUANTITIES

Size	Flange Size	Dimensions										TM-585-70-66		Master Ctn. Qty.
		A	B	C	D	E	F	G	H	I	J	Lbs.	Kg.	
In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.			
1/2	15	F03	.50 13	2.43 62	1.10 28	.35 9	1.42 36	.22 5.6	.39 10	.12 3	.82 .37			50
3/4	20	F03	.75 19	2.94 75	1.37 35	.35 9	1.42 36	.22 5.6	.39 10	.12 3	1.23 .56			25
1	25	F04	1.00 25	3.33 85	1.56 40	.43 11	1.65 42	.22 5.6	.47 12	.12 3	1.88 .85			20
1 1/4	32	F04	1.25 32	4.19 106	2.04 52	.43 11	1.65 42	.22 5.6	.47 12	.16 4	3.06 1.39			10
1 1/2	40	F04	1.50 38	4.70 119	2.27 58	.43 11	1.65 42	.22 5.6	.47 12	.16 4	4.45 2.02			10
2	50	F05	2.00 51	5.15 131	2.50 64	.55 14	1.97 50	.27 6.8	.63 16	.16 4	6.85 3.11			6
2 1/2	65	F05	2.00 51	5.84 148	2.50 64	.55 14	1.97 50	.27 6.8	.63 16	.16 4	9.00 4.06			1

† NIBCO supplies TM-580-70-66 conventional port valves.

*For detailed operating pressure, refer to pressure temperature chart on page 42.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Visit our website for the most current information.