

Metric Sprockets



ISO 06B Plate Type A

DIN 8187/ISO R 606

Chain Size: 06B-1 (3/8" x 7/32")

Pitch: 9.525 mm

Roller Width: 5.72 mm



Roller Dia.: 6.35 mm

Spkt. Width: 5.3 mm (bf₁)

Material: Steel C45



Models Available

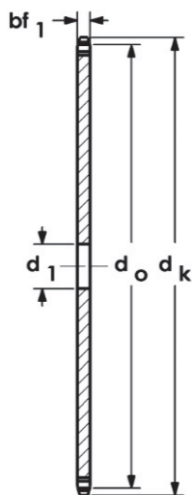

Note:

Double and triple sprockets including stainless steel available on request.

Part No.	Teeth	d _o mm	d _k mm	d ₁ mm	Wt. kg
06B-8A	8	24.89	28.0	6	0.02
06B-9A	9	37.85	31.0	8	0.02
06B-10A	10	30.82	34.0	8	0.02
06B-11A	11	33.81	37.0	8	0.03
06B-12A	12	36.80	40.0	8	0.04
06B-13A	13	39.79	43.0	8	0.04
06B-14A	14	42.81	46.0	8	0.05
06B-15A	15	45.81	50.0	8	0.06
06B-16A	16	48.82	53.0	10	0.06
06B-17A	17	51.84	56.0	10	0.07
06B-18A	18	54.85	58.0	10	0.08
06B-19A	19	57.87	62.0	10	0.09
06B-20A	20	60.89	65.0	10	0.10
06B-21A	21	63.91	68.0	10	0.11
06B-22A	22	66.93	71.0	10	0.12
06B-23A	23	69.95	73.5	10	0.14
06B-24A	24	72.97	77.0	10	0.15
06B-25A	25	76.00	80.0	10	0.16
06B-26A	26	79.02	83.0	10	0.18
06B-27A	27	82.05	86.0	10	0.19
06B-28A	28	85.07	89.0	10	0.20
06B-29A	29	88.09	92.0	10	0.22
06B-30A	30	91.12	94.7	10	0.24
06B-31A	31	94.15	98.3	12	0.26
06B-32A	32	97.18	102.0	12	0.27
06B-33A	33	100.20	104.3	12	0.29
06B-34A	34	103.23	107.3	12	0.31
06B-35A	35	106.26	111.0	12	0.32
06B-36A	36	109.29	114.0	12	0.35
06B-37A	37	112.32	116.4	12	0.37
06B-38A	38	115.34	120.0	12	0.39
06B-39A	39	118.37	122.5	12	0.40
06B-40A	40	121.40	125.5	12	0.41
06B-41A	41	124.43	128.5	16	0.45
06B-42A	42	127.46	131.6	16	0.49
06B-43A	43	130.49	134.6	16	0.51
06B-44A	44	133.52	138.0	16	0.53
06B-45A	45	136.55	141.0	16	0.55
06B-46A	46	139.58	143.7	16	0.57
06B-47A	47	142.61	146.7	16	0.60
06B-48A	48	145.64	150.0	16	0.62
06B-49A	49	148.66	152.7	16	0.65
06B-50A	50	151.70	156.0	16	0.67
06B-54A	54	163.82	168.0	16	0.80
06B-57A	57	172.91	177.0	16	0.90
06B-60A	60	182.00	186.0	16	0.98
06B-65A	65	197.15	202.0	20	1.15
06B-70A	70	212.30	217.0	20	1.34
06B-72A	72	218.37	222.5	20	1.43
06B-76A	76	230.49	235.0	20	1.60
06B-80A	80	242.61	247.5	20	1.75
06B-95A	95	288.08	293.0	20	2.50
06B-100A	100	303.25	307.7	20	2.80
06B-114A	114	345.68	349.5	20	2.98
06B-125A	125	397.02	383.5	20	3.15