

Metric Timing Pulleys



T Series - 2.5 mm Pitch Aluminum, Pilot Bore

Part No: 16T2.5/24-2

16 = Length thru Bore


T2.5 = Tooth Profile and Pitch

24 = Number of Teeth


2 = Number of Flanges




Models Available

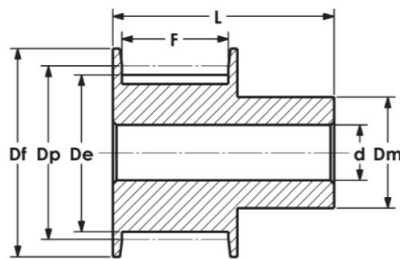

Type 1F

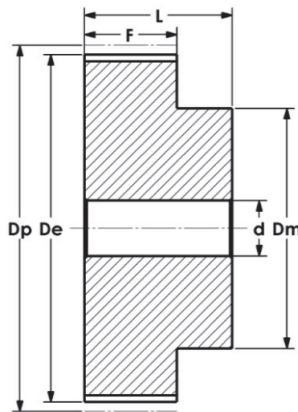

Type 6

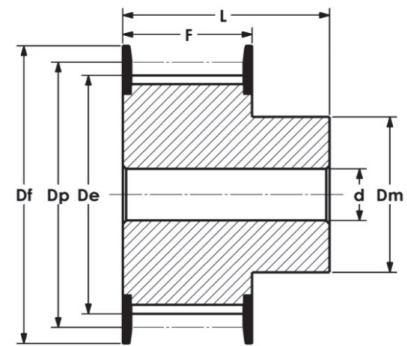

Type 6F

T - 2.5 mm Pitch x 4 mm or 6mm Belt Width

Dimensions in mm

Part No.	Part Code	Teeth	Type	Belt Width	Material	Dp	De	Df	Dm	F	L	d	Wt. kg
16T2.5/12-2	12T2.5-16	12	1F	4 or 6	AL	9.60	9.00	13.0	6	9	16	4	0.003
16T2.5/14-2	14T2.5-16	14	1F	4 or 6	AL	11.20	10.60	15.0	8	9	16	4	0.004
16T2.5/15-2	15T2.5-16	15	1F	4 or 6	AL	12.00	11.40	15.0	8	9	16	4	0.005
16T2.5/16-2	16T2.5-16	16	1F	4 or 6	AL	12.80	12.20	16.0	9.5	9	16	4	0.005
16T2.5/18-2	18T2.5-16	18	6F	4 or 6	AL	14.40	13.80	17.5	10	10	16	4	0.006
16T2.5/19-2	19T2.5-16	19	6F	4 or 6	AL	15.20	14.60	18.0	10	10	16	4	0.007
16T2.5/20-2	20T2.5-16	20	6F	4 or 6	AL	16.00	15.40	20.0	11	10	16	4	0.008
16T2.5/22-2	22T2.5-16	22	6F	4 or 6	AL	17.60	17.00	23.0	11	10	16	4	0.009
16T2.5/24-2	24T2.5-16	24	6F	4 or 6	AL	19.15	18.55	23.0	12	10	16	4	0.012
16T2.5/25-2	25T2.5-16	25	6F	4 or 6	AL	19.95	19.35	23.0	13	10	16	4	0.01
16T2.5/26-2	26T2.5-16	26	6F	4 or 6	AL	20.75	20.15	25.0	14	10	16	4	0.01
16T2.5/28-2	28T2.5-16	28	6F	4 or 6	AL	22.35	21.75	25.0	14	10	16	4	0.02
16T2.5/30-2	30T2.5-16	30	6F	4 or 6	AL	23.95	23.35	28.0	16	10	16	6	0.02
16T2.5/32-2	32T2.5-16	32	6F	4 or 6	AL	25.95	24.95	32.0	16	10	16	6	0.02
16T2.5/36-2	36T2.5-16	36	6F	4 or 6	AL	28.75	28.10	36.0	20	10	16	6	0.03
16T2.5/40-2	40T2.5-16	40	6F	4 or 6	AL	31.90	31.30	38.0	22	10	16	6	0.03
16T2.5/44-2	44T2.5-16	44	6F	4 or 6	AL	35.10	34.50	42.0	24	10	16	6	0.04
16T2.5/48-0	48T2.5-16	48	6	4 or 6	AL	38.30	37.70	—	26	10	16	6	0.05
16T2.5/60-0	60T2.5-16	60	6	4 or 6	AL	47.85	47.25	—	34	10	16	8	0.07

Note: Finished Bore & Keyway available on request.