


# PHOTOCONTROLS

## Contactors with Turn-Lock

### 5400A Series



#### SPECIFICATIONS


- **Receptacle:** 3-prong turn-lock meets the requirements of EEL NEMA.
- **Power Consumption:** Maximum 3 watts during daylight.
- **Switch Type:** 3PST

#### APPLICATIONS

- For street lighting. Controls all lighting loads in excess of the capacity of the photoelectric control contacts.

#### FEATURES

- **Operation:** Instant ON and 3-5 second delay OFF to prevent false switching due to light from passing vehicles, lighting, etc. Photocontrol provides dusk to dawn control of lighting contractor for heavy duty switching.
- **Standards:** Meets UL773 and ANSI C136.10 for photocontrols.
- **Housing:** Outdoor NEMA Type 3R. Grey enamel finish. Two 1/2"– 3/4" combination KO in bottom.

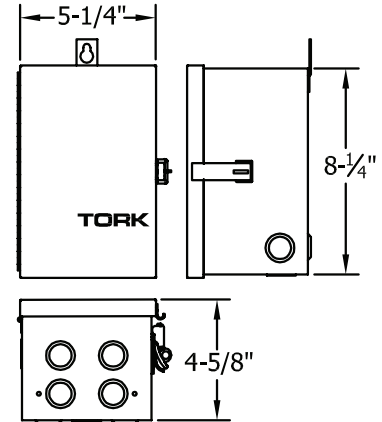

CAT. NO.	CERTIFICATION	UPC CODE	PHOTOCONTROL INCLUDED	VOLTAGE VAC 50/60Hz	RESISTIVE	RATING		MOTOR
						TUNGSTEN	ELECTRONIC BALLAST (LED)	
5403A	cULus	81012	2005B	120	40A	30A	40A	3HP @ 120 7.5HP @ 240
5404A	cULus	81013	2007B	208-240	40A	30A	40A	3HP @ 120 7.5HP @ 240
5404-3A	cULus	81014	2007B	277	40A	30A	40A	3HP @ 120 7.5HP @ 240