





REMOVABLE CAP  
TO TIGHTEN SCREW  
(REPLACE WHEN COMPLETE)

REMOVABLE CAP  
FOR DUAL ENTRY  
(INSERT IN OTHER SIDE)

IPLMD750-5 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
IPLMD750-3	3	6.32
IPLMD750-4	4	7.75
IPLMD750-5	5	9.18
IPLMD750-6	6	10.60
IPLMD750-7	7	11.65
IPLMD750-8	8	13.45
IPLMD750-10	10	16.30
IPLMD750-12	12	18.78

WIRE ENTRY POINT  
WIRE RANGE: 750KCMIL - 250  
PRE-FILLED W/ OXIDE INHIBITOR

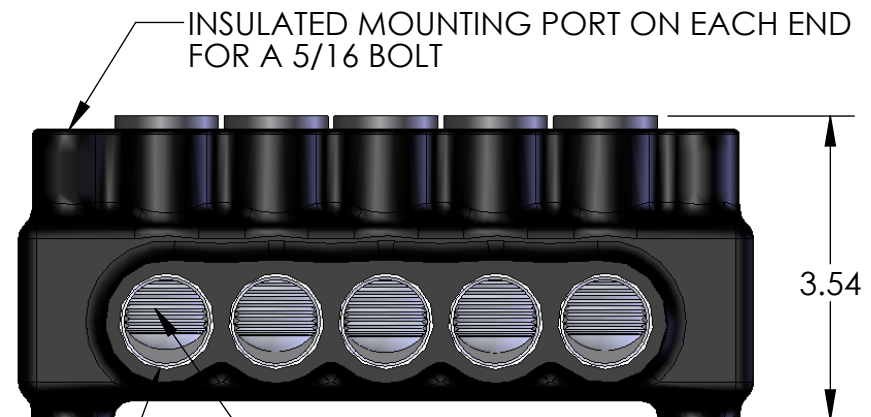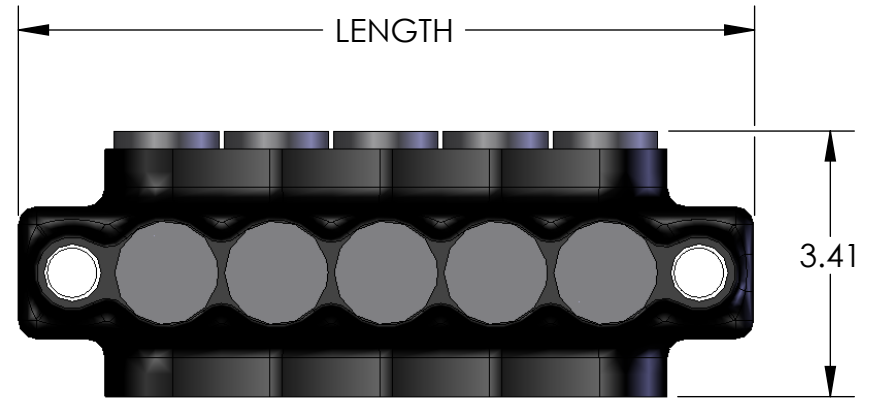

CONTACT NSi FOR SALES @ 800.321.5847



**POLARIS**  
SALES CO. INC

PROPRIETARY AND CONFIDENTIAL

11625 PROSPEROUS DRIVE ODESSA, FL 33556

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
POLARIS SALES CO. INC. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
POLARIS SALES CO. INC. IS PROHIBITED.

**TITLE:**  
INSULATED MOUNTED  
DUAL ENTRY  
750 CONNECTOR

**NAME**  
DRAWN BY S.PARRY

**DATE**  
06/2012

**DWG. NO.**

IPLMD750-

**MATERIAL:** N/A

**SCALE:** N/A

**SHEET:** 1 OF 1

**NOTES:**

1. CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
2. DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
3. COLD TEMPERATURE RATED TO -45°C.
4. HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION, CHEMICAL AND UV RESISTANT.