

MINITERMS

Flange Spade Terminals

S Series

SPECIFICATIONS

- **Vinyl:** Electro tin plated copper, vinyl (PVC) 600V, 75 °C.
- **Un-Insulated:** Electro tin plated copper, 600V, 105 °C.
- **Nylon:** Electro tin plated copper, Nylon, 600V, 105 °C.

FEATURES

- Vinyl, Un-Insulated and Nylon Flange Spades have turned up edges giving this spade more safety and reliability. Flanges give a location and locking action that aid in installation.
- Available in vinyl, nylon, polyolefin and un-insulated formats.

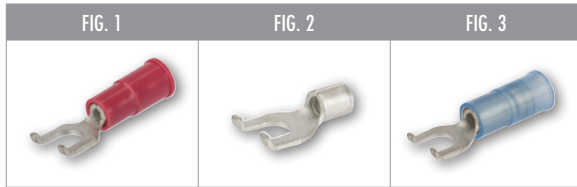


FIG. NO.	INSULATION TYPE	WIRE RANGE	STUD SIZE	RATINGS	LENGTH (IN)	WIDTH (IN)	SEAM TYPE	STD PACKS		BULK PACKS	
								CAT. NO.	QTY	CAT. NO.	QTY
1	Vinyl	22-18	#6	UL	0.836	0.301	Butted	S22-6V-F	100	S22-6V-F-BULK	1000
1	Vinyl	22-18	#8	UL	0.836	0.301	Butted	S22-8V-F	100	S22-8V-F-BULK	1000
1	Vinyl	16-14	#10	UL	0.850	0.301	Butted	S16-10V-F	100	S16-10V-F-BULK	1000
1	Vinyl	16-14	#6	UL	0.850	0.301	Butted	S16-6V-F	100	S16-6V-F-BULK	1000
1	Vinyl	16-14	#8	UL	0.850	0.301	Butted	S16-8V-F	100	S16-8V-F-BULK	1000
1	Vinyl	12-10	#10	UL	1.075	0.320	Butted	S12-10V-F	50	S12-10V-F-BULK	1000
1	Vinyl	12-10	#8	UL	1.075	0.320	Butted	S12-8V-F	50	S12-8V-F-BULK	1000
2	Un-insulated	16-14	#10	UL	0.635	0.300	Brazed	S16-10-F	100	S16-10-F-BULK	1000
2	Un-insulated	16-14	#6	UL	0.570	0.301	Brazed	S16-6-F	100	S16-6-F-BULK	1000
3	Nylon	22-18	#6	UL	0.885	0.294	Butted	S22-6N-F	100	S22-6N-F-BULK	1000
3	Nylon	16-14	#10	UL	0.910	0.293	Butted	S16-10N-F	100	S16-10N-F-BULK	1000
3	Nylon	16-14	#6	UL	0.910	0.293	Butted	S16-6N-F	100	S16-6N-F-BULK	1000
3	Nylon	16-14	#8	UL	0.908	0.294	Butted	S16-8N-F	100	S16-8N-F-BULK	1000
3	Nylon	12-10	#10	UL	0.770	0.385	Butted	S12-10N-F	50	S12-10N-F-BULK	1000