




FEATURES

- For connecting the grounding conductor in rigid conduit to water pipe.
- Copper strap allows flexibility during grounding and helps protect the conduit system from the results of vibrations in the water system.
- Assembled with zinc-plated steel screws.

RATINGS



UL Listed 467 Grounding & Bonding.

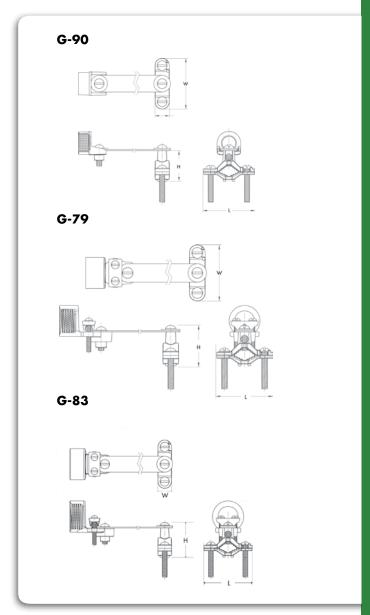

All dimensional data is listed in inches.

CAT. NO.	CONDUIT Hub Size	PIPE SIZE (IPS)	GROUND WIRE RANGE	STD. CTN. QTY.
G-90	1/2	1/2 - 1	10 SOL — 2/0 STR	15
G-79	3/4	1/2 - 1	10 SOL — 2/0 STR	12
G-83	1	1/2 - 1	10 SOL — 3/0 STR	12