

# CABLE TIES

## Releasable & Stainless Steel Ties

-R, SS Series

### FEATURES

#### Releasable (-R)


- Releasable ties are manufactured from either natural Nylon 66 or Weather Resistant Nylon 66, these ties can be easily released and re-used.

#### Stainless Steel Cable Ties (SS)

- Made of Grade 304 stainless steel and are ideally suited for hazardous environments.
- Roller-ball design that is self locking, fast and easy to install.
- Smooth edges will not damage wires and it can be installed by hand or with a tool.
- Available with a non-toxic, halogen-free polyester coating in a wide choice of colors.
- Available in Grade 316, for applications that require extremely high corrosion resistance. To order 316SS material, add suffix "-316" to part number.

### SPECIFICATIONS

- UL Recognized.
- **Temperature Rating (-R):** -40 °C to 85 °C (-40 °F to 185 °F).
- **Temperature Rating (SS):** -80 °C to 538 °C (-62.2 °F to 281.1 °F).
- **Stainless Steel Ties (True Plenum Rating):** Air handling ties approved for indoor use in air handling spaces and plenums and ducts per NFPA-1993.

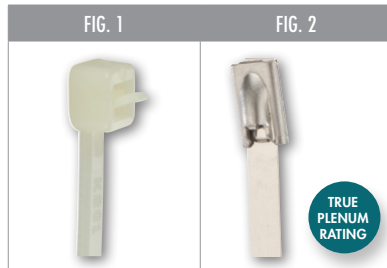

CAT. NO.	FIG. NO.	MAX. WIRE/CABLE SIZE	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH	LENGTH (IN.)	WIDTH (IN.)	STD. PKG. QTY.	STD. CTN. QTY.
850-R	1	8"	2.000	50 Lbs.	8.00	0.210	100	1,000
SS8100	2	8"	1.970	100 Lbs.	8.000	0.181	100	500
SS14100	2	14"	3.940	100 Lbs.	14.000	0.181	100	500
SS14250	2	20"	3.940	250 Lbs.	14.000	0.311	100	500
SS20100	2	20"	5.900	100 Lbs.	20.5	0.181	100	500
SS20250	2	20"	5.900	250 Lbs.	20.5	0.311	100	500
SS26250	2	26"	7.870	250 Lbs.	26.5	0.311	100	500