

# CABLE TIES

## Velcro Ties


### V Series

#### SPECIFICATIONS

- UL Recognized.

#### FEATURES

- Unique back-to-back fastening system: a self-gripping, double-sided strap that is easy to use and cost effective.
- Molded high performance polyethylene hook fastener laminated on to a non-woven polyester loop.
- Low peel strength allows for easy entry or removal by the user yet the average shear strength is 3.0 PSI, which increases substantially with each circular rotation.
- Will not over-cinch delicate cable and fiber optics.
- For use with cord and cable management, wire harnesses, inventory control, fibre optics, packaging, in-plant maintenance, etc.
- Allow for a minimum 2" overlap when installing.
- Available in five colors.

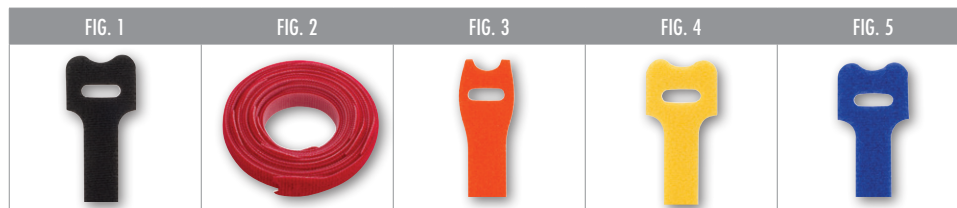

CAT. NO.	FIG. NO.	COLOR	MAX. WIRE/CABLE SIZE	MAX. BUNDLE DIAMETER	LENGTH (IN.)	WIDTH (IN.)	PCS. PER. PKG.	PKG. PER. CTN.
V850	1	Black	8"	1.750	8"	0.500	10	25
V850-2	2	Red	8"	1.750	8"	0.500	10	25
V850-3	3	Orange	8"	1.750	8"	0.500	10	25
V850-4	4	Yellow	8"	1.750	8"	0.500	10	25
V850-6	5	Blue	8"	1.750	8"	0.500	10	25
V1250	1	Black	12"	3.000	12"	0.500	10	20
V1250-2	2	Red	12"	3.000	12"	0.500	10	20
V1250-4	4	Yellow	12"	3.000	12"	0.500	10	20
V1250-6	5	Blue	12"	3.000	12"	0.500	10	20
V875	1	Black	80"	Perforated Every 8"	80"	0.75	1	10
V1275	1	Black	10'	Perforated Every 12"	10'	0.75	1	10
V180*	1	Black	15'	Roll	15'	0.75	1	10
V900*	1	Black	75'	Roll	75'	0.75	1	3
V7200*	1	Black	600'	Roll	600'	0.75	1	1

\*Rolls of Velcro tape can be cut to desired length.