

MINITERMS

Butt Splices

B Series

FEATURES

- Constructed from electro-tin plated copper tubing.
- Center stop provides equal insertion of wires.
- Available in vinyl, nylon, polyolefin and un-insulated formats.

SPECIFICATIONS

- **Vinyl:** Electro tin plated copper, vinyl (PVC) 600V, 75 °C.
- **Un-Insulated:** Electro tin plated copper, 600V, 105 °C.
- **Polyolefin HS:** Electro tin plated copper, Heat shrink, 600V, 105 °C, Shrink temp 150 °C.
- **Nylon:** Electro tin plated copper, Nylon, 600V, 105 °C.

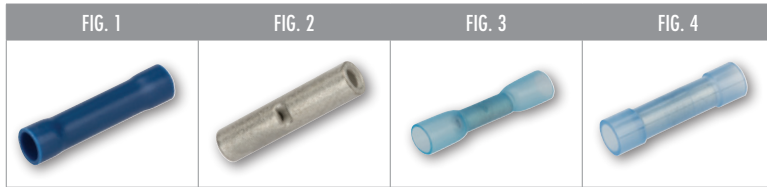


FIG. NO.	INSULATION TYPE	WIRE RANGE	RATINGS	OA LENGTH (L) (IN.)	SEAM TYPE	"S" PACKS		PRO PACKS		STD PACKS		BULK PACKS	
						CAT. NO.	QTY	CAT. NO.	QTY	CAT. NO.	QTY	CAT. NO.	QTY
1	Vinyl	22-18	cULus	1.024	Seamless	B22-V-S	25	B22-V-P	70	B22-V	100	B22-V-BULK	1000
1	Vinyl	16-14	cULus	1.024	Seamless	B16-V-S	20	B16-V-P	50	B16-V	100	B16-V-BULK	1000
1	Vinyl	12-10	cULus	1.024	Seamless	B12-V-S	15	B12-V-P	30	B12-V	50	B12-V-BULK	500
1	Vinyl	8	—	1.398	Seamless	—	—	B8-V-P	10	B8-V	50	B8-V-BULK	250
1	Vinyl	6	UL	1.855	Seamless	—	—	—	—	B6-V	50	B6-V-BULK	100
2	Un-insulated	22-18	cULus	0.472	Seamless	—	—	—	—	B22	100	B22-BULK	1000
2	Un-insulated	16-14	cULus	0.591	Seamless	—	—	—	—	B16	100	B16-BULK	1000
2	Un-insulated	12-10	cULus	0.591	Seamless	—	—	—	—	B12	50	B12-BULK	1000
2	Un-insulated	8	UL	0.827	Seamless	—	—	—	—	B8	50	B8-BULK	1000
3	Polyolefin HS	22-18	—	0.945	Seamless	—	—	—	—	SB22	25	SB22-BULK	500
3	Polyolefin HS	16-14	—	1.457	Seamless	—	—	—	—	SB16	25	SB16-BULK	500
3	Polyolefin HS	12-10	—	1.614	Seamless	—	—	—	—	SB12	50	SB12-BULK	500
4	Nylon	22-18	cULus	1.024	Seamless	—	—	—	—	B22-N	100	B22-N-BULK	1000
4	Nylon	16-14	cULus	1.024	Seamless	—	—	—	—	B16-N	100	B16-N-BULK	1000
4	Nylon	12-10	cULus	1.063	Seamless	—	—	—	—	B12-N	50	B12-N-BULK	500