



Metric Sprockets



ISO 10B-2 and 10B-3 Hub Type B

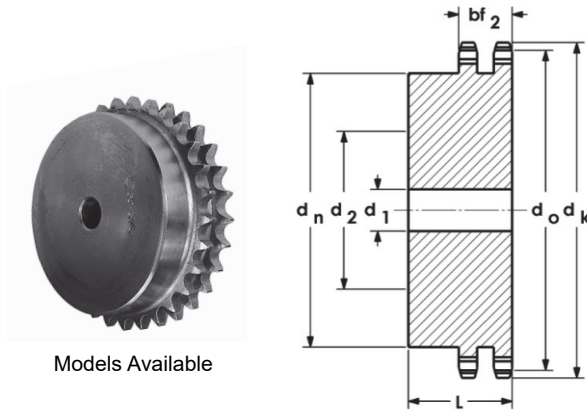

Models Available

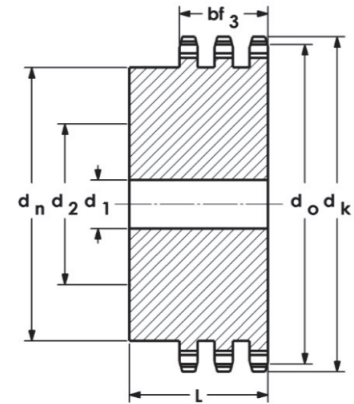

Chain Size: 10B-2 (5/8" x 3/8")

Spkt Width: 25.5mm (bf₂)

Part No.	Teeth	d _o mm	d _k mm	d _n mm	d ₁ mm	d ₂ * mm	L mm	Wt. kg
10B-2-8B	8	41.48	47.0	25	12	16	40	0.21
10B-2-9B	9	46.42	52.6	30	12	18	40	0.27
10B-2-10B	10	51.37	57.5	35	12	20	40	0.35
10B-2-11B	11	56.34	63.0	39	14	23	40	0.45
10B-2-12B	12	61.34	68.0	44	14	26	40	0.55
10B-2-13B	13	66.32	73.0	49	14	30	40	0.68
10B-2-14B	14	71.34	78.0	54	14	34	40	0.84
10B-2-15B	15	76.36	83.0	59	14	37	40	0.95
10B-2-16B	16	81.37	88.0	64	16	40	45	1.25
10B-2-17B	17	86.39	93.0	69	16	43	45	1.45
10B-2-18B	18	91.42	98.3	74	16	46	45	1.65
10B-2-19B	19	96.45	103.3	79	16	49	45	1.90
10B-2-20B	20	101.49	108.4	84	16	52	45	2.10
10B-2-21B	21	106.52	113.4	85	16	53	45	2.27
10B-2-22B	22	111.55	118.0	90	16	46	45	2.58
10B-2-23B	23	116.58	123.4	95	16	60	45	2.80
10B-2-24B	24	121.62	128.3	100	16	63	45	3.12
10B-2-25B	25	126.66	134.0	105	16	66	45	3.40
10B-2-26B	26	131.70	139.0	110	20	70	45	3.70
10B-2-27B	27	136.75	144.0	110	20	70	45	3.90
10B-2-28B	28	141.78	148.7	115	20	73	45	4.25
10B-2-29B	29	146.83	153.8	115	20	73	45	4.50
10B-2-30B	30	151.87	158.8	120	20	76	45	4.85
10B-2-31B	31	156.92	163.9	120	20	76	45	4.95
10B-2-32B	32	161.95	168.9	120	20	76	45	5.10
10B-2-33B	33	167.00	174.5	120	20	76	45	5.20
10B-2-34B	34	172.05	179.0	120	20	76	45	5.30
10B-2-35B	35	177.10	184.1	120	20	76	45	5.45
10B-2-36B	36	182.15	189.1	120	20	76	45	5.60
10B-2-37B	37	187.20	194.2	120	20	76	45	6.30
10B-2-38B	38	192.24	199.2	120	20	76	45	7.00
10B-2-39B	39	197.29	204.2	120	20	76	45	7.30
10B-2-40B	40	202.34	209.3	120	20	76	45	7.52

*Note: Approximate max bore, consult PTI for larger sizes.

Chain Size: 10B-3 (5/8" x 3/8")

Spkt Width: 42.1mm (bf₃)

Part No.	Teeth	d _o mm	d _k mm	d _n mm	d ₁ mm	d ₂ * mm	L mm	Wt. kg
10B-3-8B	8	41.48	47.0	25	12	16	55	0.28
10B-3-9B	9	46.42	52.6	30	12	18	55	0.38
10B-3-10B	10	51.37	57.5	35	16	20	55	0.50
10B-3-11B	11	56.34	63.0	39	16	23	55	0.62
10B-3-12B	12	61.34	68.0	44	16	26	55	0.77
10B-3-13B	13	66.32	73.0	49	16	30	55	0.97
10B-3-14B	14	71.34	78.0	54	16	34	55	1.16
10B-3-15B	15	76.36	83.0	59	16	37	55	1.35
10B-3-16B	16	81.37	88.0	64	16	40	60	1.65
10B-3-17B	17	86.39	93.0	69	16	43	60	1.96
10B-3-18B	18	91.42	98.3	74	16	46	60	2.25
10B-3-19B	19	96.45	103.3	79	16	49	60	2.50
10B-3-20B	20	101.49	108.4	84	16	52	60	2.90
10B-3-21B	21	106.52	113.4	85	20	53	60	3.10
10B-3-22B	22	111.55	118.0	90	20	46	60	3.44
10B-3-23B	23	116.58	123.4	95	20	60	60	4.05
10B-3-24B	24	121.62	128.3	100	20	63	60	4.33
10B-3-25B	25	126.66	134.0	105	20	66	60	4.60
10B-3-26B	26	131.70	139.0	110	20	70	45	5.00
10B-3-27B	27	136.75	144.0	110	20	70	60	5.40
10B-3-28B	28	141.78	148.7	115	20	73	60	5.80
10B-3-29B	29	146.83	153.8	115	20	73	60	6.18
10B-3-30B	30	151.87	158.8	120	20	76	60	6.69
10B-3-31B	31	156.92	163.9	120	20	76	60	7.20
10B-3-32B	32	161.95	168.9	120	20	76	60	7.50
10B-3-33B	33	167.00	174.5	120	20	76	60	8.00
10B-3-34B	34	172.05	179.0	120	20	76	60	8.57
10B-3-35B	35	177.10	184.1	120	20	76	60	8.80
10B-3-36B	36	182.15	189.1	120	25	76	60	9.30
10B-3-37B	37	187.20	194.2	120	25	76	60	9.78
10B-3-38B	38	192.24	199.2	120	25	76	60	9.90
10B-3-39B	39	197.29	204.2	120	25	76	60	10.30
10B-3-40B	40	202.34	209.3	120	25	76	60	10.80