

# Central Brass

COMPANY

Brecksville, Ohio 44141

Phone: (216) 883-0220 Fax: (440) 526-5745


www.CentralBrass.com

MODEL NOS.  
**0123-A 0123-A-Q 80123-A**  
**KITCHEN TOPMOUNT**

O-Ring Compression    1/4-Turn Compression  
**0123-A**                      **0123-A-Q**

Ceramic Units  
**80123-A**


The 8-inch center topmounted kitchen faucet has a cast brass body that is copper, nickel and chrome plated. The stems are all brass, with a double O-Ring seal and rubber seat washer (for compression stems) or ceramic sealing discs (for ceramic units). The canopy handles are zinc die cast with a chrome plated finish. The 8-inch swivel "D" spout is brass with a chrome plated finish and is fitted with a water saving aerator that limits the flow rate. The O-Rings and seals are rubber. The faucet has a spray rinse attachment that is connected with a 48-inch long nylon hose with a chrome plated guide.

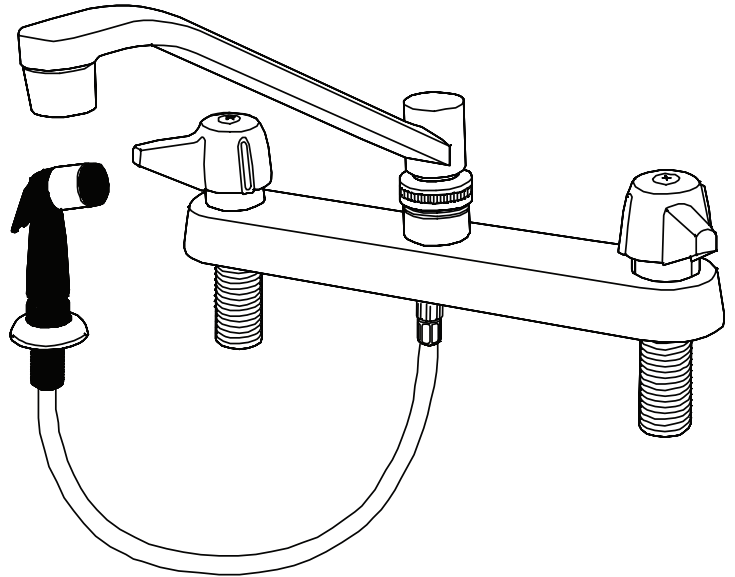

Flow Rate: 2.0 GPM @ 60 psi  
ADA Compliant and Meets ASME A112.18.1M  
ANSI/NSF 61/Section 9 Certified



## Installation Drawing

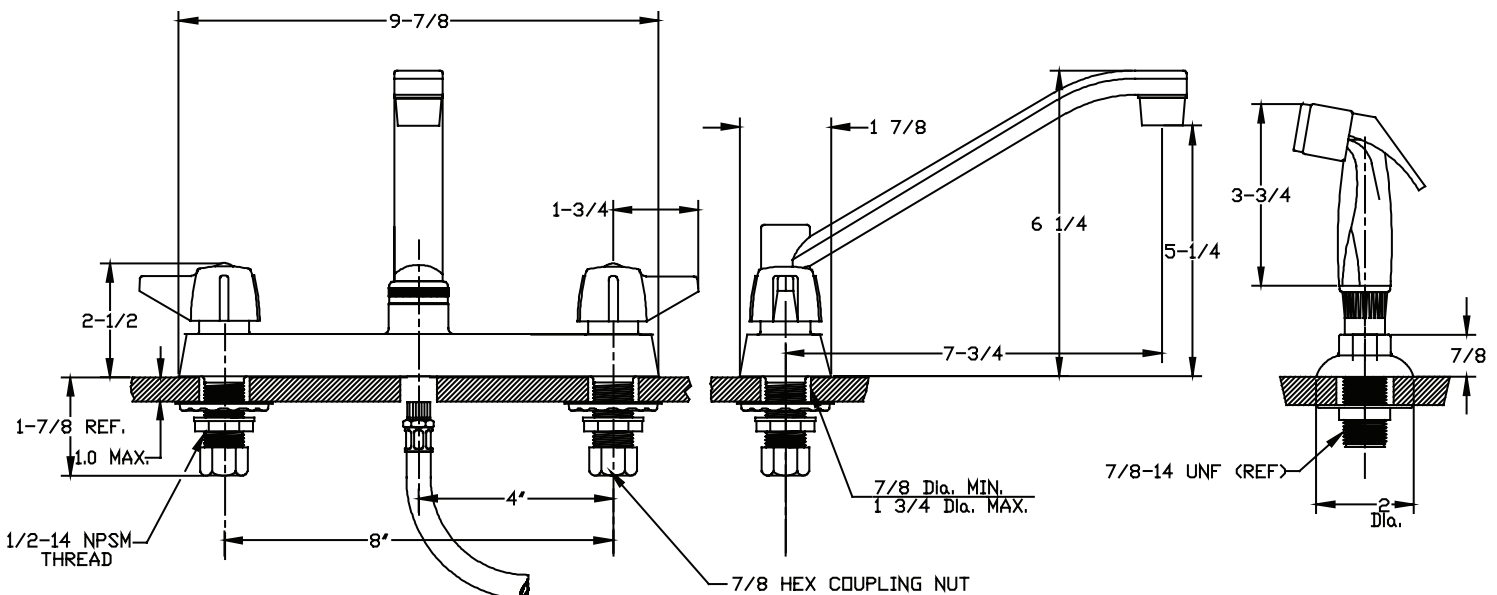

# Central Brass

COMPANY

Brecksville, Ohio 44141

Phone: (216) 883-0220 Fax: (440) 526-5745

www.CentralBrass.com

**MODEL NOS.**  
**0123-A 0123-A-Q 80123-A**  
**KITCHEN TOPMOUNT**

## Suffix Options & Accessories



Faucets with lever, wrist or elbow handles with compression or ceramic stem cartridges are ADA compliant.


# Handle variations available

ELS - Suffix  
 Wrist 4-inch  
 EL - Suffix  
 Elbow 6-inch




G-4147 (4-inch)  
 G-4149 (6-inch)

Cast Brass Spout Extension  
 Accessory

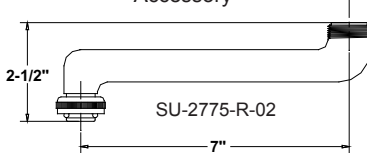


Wall Mount  
 Spout Adaptor  
 Accessory



G-1748-88W


# Spout variations available

A07 - Suffix  
 8 3/4-inch Cast Brass Spout

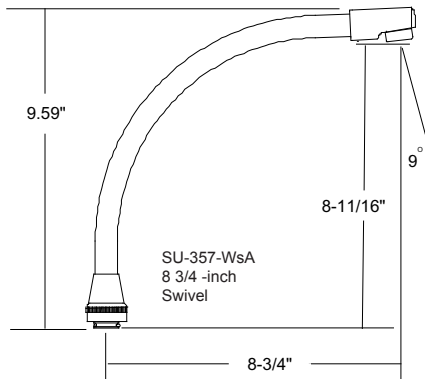


Drinking water products tested and certified by NSF International to ANSI/NSF Standard 61, Section 9. Each product required to meet the standard proudly exhibits the NSF logo.

A8 - Suffix  
 7 1/4-inch High-Rise Swivel Spout

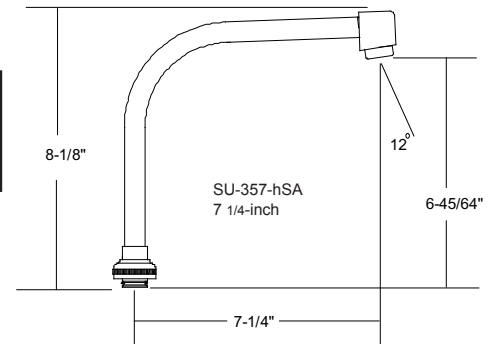

GSA - Suffix  
 4 3/32 Swivel Gooseneck Spout  
 GRA - Suffix  
 4 3/32 Rigid Gooseneck Spout

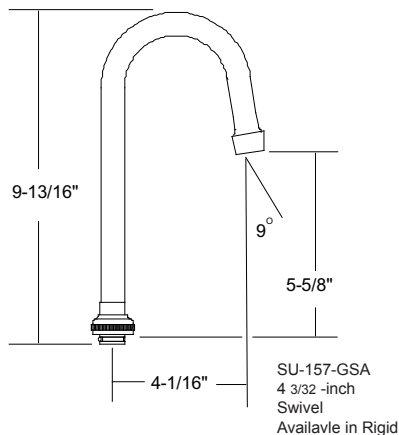

KSA - Suffix  
 5 1/2 Swivel Gooseneck Spout  
 KRA - Suffix  
 5 1/2 Rigid Gooseneck Spout

