


SDR 26 Solvent Weld Sewer Fittings

Injection Molded in Sizes 4" - 8"
Fabricated in Sizes 10" - 24"

The M series is a line of SDR 26 solvent weld sewer fittings that has been engineered to perform in the harshest environments. Our fittings are designed and manufactured to consistent dimensions and laying lengths to deliver a securely sealed, water-tight joint connection on every installation. Only virgin compounds are used in our injection molding process to ensure the highest quality and durability.

All fittings are thoroughly tested for joint tightness, internal stress and stability, color and uniformity. SDR 26 solvent weld sewer fittings conform to all municipal, federal, and military requirements and are available in a wide range of sizes.

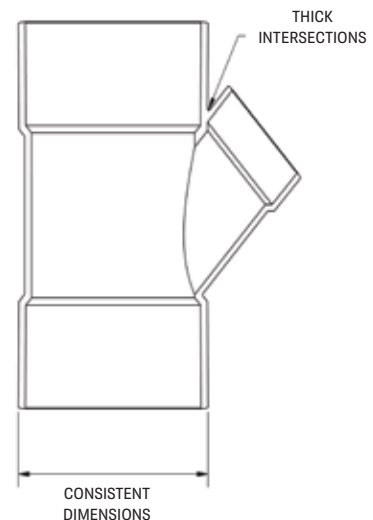

Design Advantages

- Designed for easy assembly
- Highest quality materials for long lasting performance
- Consistent dimensions provide joint integrity
- Broadest offering in the industry

Applications

Non-pressure drainage of sewer and surface water wherever heavy SDR 26 is specified.

Typical Uses:

Drainage

Municipal
Commercial


Lateral Connections to Municipal Sewers

Sanitary
Storm

Surface Drainage

Foundation drains
Radon gas venting
Yard drainage

Attention: Royal Building Product's fittings are not to be used or tested with compressed air or gases.

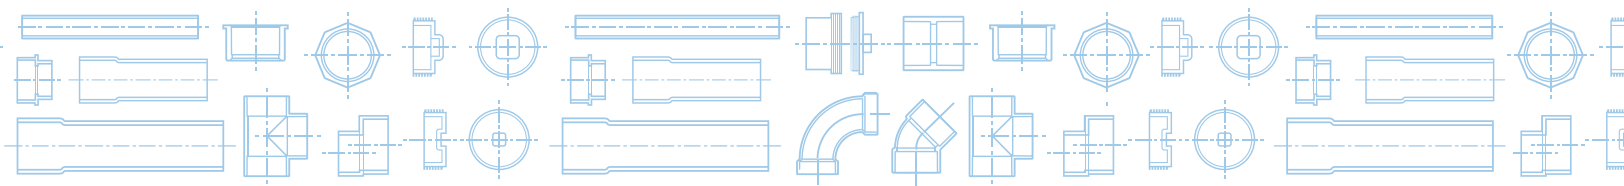

M-Series

The M series is an SDR 26 solvent weld sewer fitting line developed with structural integrity for high performance and easy assembly.



Short Form Specifications

4" through 12" injection molded solvent weld SDR 26 sewer fittings shall be manufactured in accordance with ASTM D3034, and CSA B182.2. They shall be injection molded from virgin PVC compound having a cell classification of 12454 or 13343 in accordance with ASTM D1784.

Certification

Our solvent SDR 26 molded weld sewer fittings are manufactured to meet specs defined in ASTM D3034 and CSA B182.2.