



MOLDED



ASSEMBLED FROM
MOLDED COMPONENTS

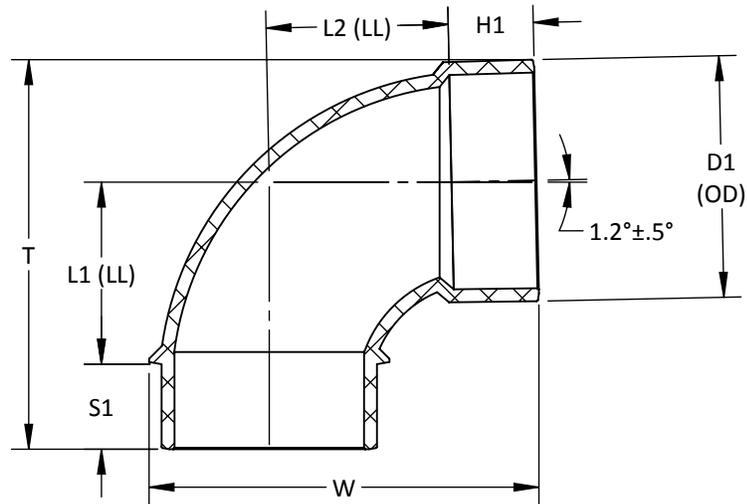

ASTM D2665, F1866, F2135, CSA B181.2 WHERE APPLICABLE

**1/4 BEND (90) SxH LONG SWEEP
PVC SOLVENT WELD DWV**

PART NO.	SIZE IN INCHES	L1	L2	S1	H1	T	W	D1
* D274	4	3 7/8	3 7/8	1 25/32	1 25/32	8 5/32	8 7/32	5 1/32
* D277	6	5 1/32	5 1/32	3 1/16	3 1/16	11 11/16	11 3/4	7 7/32
* D278	8	6 3/16	6 1/32	4 1/16	4 1/16	14 29/32	14 31/32	9 11/32
† D2710	10	11 7/16	11 7/16	5 1/16	5 1/16	22 1/4	22 3/8	11 17/32
† D2712	12	12 25/32	12 25/32	6 1/16	6 1/16	25 5/8	25 25/32	13 19/32

-- DIMENSIONS AND APPEARANCE ARE APPROXIMATE AND SUBJECT TO CHANGE
WITHOUT NOTICE DUE TO DESIGN OR PRODUCTION MODIFICATIONS
-- MOLDED FITTING TOLERANCE = ±1/8" OVERALL LENGTH
-- FABRICATED FITTING TOLERANCE = ±1" LINEAR, ± 2° ANGULAR

* MOLDED FITTING
† ASSEMBLED FROM MOLDED COMPONENTS
ALL OTHER FITTINGS ARE FABRICATED