

# New Product Announcement | Compact Series 3000

## Premium Duty Hose and Cord Reels Series 3000

Series 3000 reels are all-steel construction and ultra-compact for a wide range of bench mount or mobile applications with critical space requirements.

- **Compact size** - Reel easily fits within a 1 ft. x 1 ft. space.
- **Easy to mount** - Multiple slotted mounting holes to accommodate many configurations.
- **Inlet located on base** - Eliminates the possibility of cord/hose interfering with spool operation.
- **Optional guide arm accessory** - Guide arm integral to reel base on standard reel, optional accessory available for multiple adjustment positions.
- **Guide rollers** - Premium acetal rollers extend hose and cord life.
- **Enclosed drive spring** - Mechanism enclosed for protection against the environment.
- **Adjustable bumper stop** - Allows any desired length of hose or cord to be maintained outside the reel.
- **Corrosion resistant** - Steel components are individually powder coated to virtually eliminate corrosion.

**NEW!**

Power cord reel  
L 3030 123 3





**NEW!**

Air/water hose reel  
B3425 OLP



Optional guide arm accessory for multiple adjustment positions

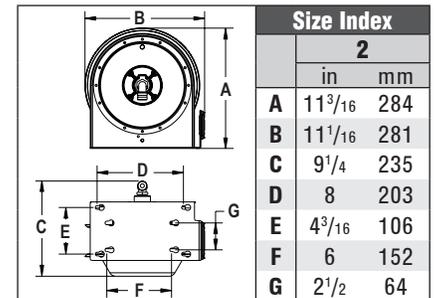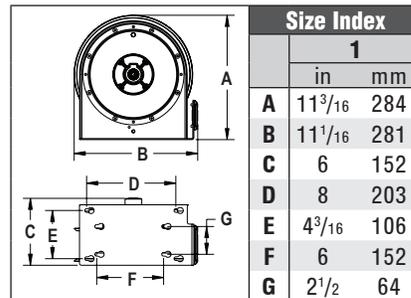

### Hose Reels

Model with hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	
<b>Low Pressure Air / Water Hose Reels</b> Maximum temperature 150 °F (65 °C)													
B3415 OLP	17	7.7	1/4	6	.475	12	15	4.6	300	21	1/4	3/8	1
B3425 OLP	18	8.2	1/4	6	.475	12	25	7.6	300	21	1/4	3/8	1
B3610 OLP	17	7.7	3/8	10	.600	15	10	3.0	300	21	1/4	3/8	1
B3620 OLP	18	8.2	3/8	10	.600	15	20	6.1	300	21	1/4	3/8	1

Low pressure reels furnished standard with PVC hose.

### Cord Reels

Model with Cord	Cord Ending	Cord Specifications						Volts	Amps	Weight		Size Index #
		AWG	mm <sup>2</sup>	# Cond	ft	m	Type			lbs	kg	
L 3030 123 3	Single Receptacle	12	3.32	3	30	9	SJTO	125	15	23	10.4	2
L 3030 123 7Q	Quad Box	12	3.32	3	30	9	SJTO	125	20	24.5	11.1	2
L 3030 123 X	Flying Lead	12	3.32	3	30	9	SJTO	125	20	23.5	10.7	2

For indoor, non-weather tight applications only. All models UL listed at 125 Volt 60 HZ single phase. Models supplied with 4 ft. inlet cord.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse Indiana & California Warehouses California Warehouse Canadian Warehouse

Customer Service: 1.855.634.9109  
All Other Calls: 1.800.444.3134

www.reelcraft.com  
reelcraft@reelcraft.com

