



Paircoil

Pre-insulated, paired lineset for mini-split installation.

Quicker measuring. More accurate cutting.



NEW! Length markings every 2 feet
NEW! 50ft length.

Embossed film coating allows easier installation.



Extra tough, fire retardant,
industrial grade, cross-
polyethylene insulation.

Strong, and durable ASTM B280
industry standard copper tubing.

Labor-saving, single-run installation
of both lines.

Available in two paired sizes:

- 1/4" x 3/8"
- 1/4" x 1/2"

Available through all major HVAC wholesale distributors.

RectorSeal® Paircoil

Pre-insulated and paired linesets

Code	Tubing Diameter	Insulation	Length	Qty.
87781	1/4" (6.35mm) liquid line	3/8"	50ft	1
	3/8" (9.52mm) suction line	3/8"		
	Length markers every 2ft.			
87782	1/4" (6.35mm) liquid line	3/8"	50ft	1
	1/2" (12.7mm) suction line	3/8"		
	Length markers every 2ft.			


Additional information:

- 3/8-inch (9.52-mm) insulation thickness allows space with all lineset protection ducting such as Fortress and SlimDuct.
- Accommodates operating pressures of up to 600 psi.
- Meets ASTM-International specification standard B280 seamless copper tube for air-conditioning and refrigeration field service; and C534 for preformed flexible, elastomeric cellular thermal insulation.



- Malleable copper tubing and insulation easily shapes to fit any application.

- Sturdy, protective cardboard box
- Easily stacked without damaging line-set
- Fully illustrated package

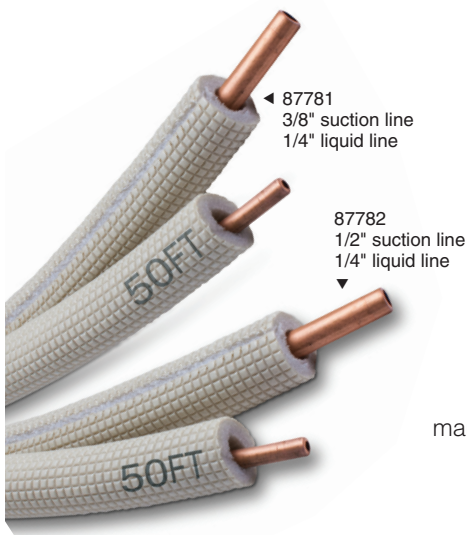

Paircoil is easily separated by hand without cutting tools.



- Copper tubing allows bending, shaping and forming without kinking.
- Durable industrial-grade white insulation reflects solar heat, is water-resistant, and features a hardened, but ductile surface. It does not absorb moisture or prematurely disintegrate from UV light or freeze/thaw cycles.
- UV light and wear-resistant coating will not tear. Low-friction surface allows easy pulling. Embossed incremental two-foot inscriptions for hands-free measuring.
- 50' roll can be freely cut to appropriate length

