



MOLDED



FABRICATED (APPEARANCE MAY VARY)

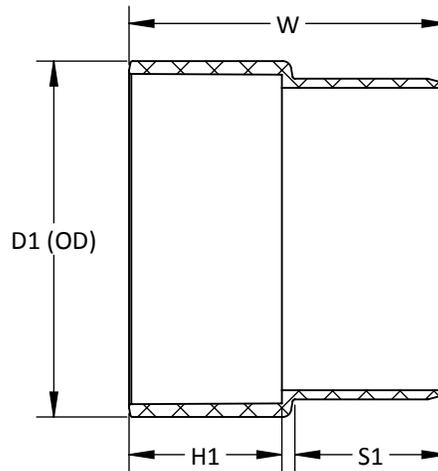

ASTM D3034, CSA B182.2  
 ASTM D2665, F2135, F1866, CSA B181.2  
 WHERE APPLICABLE

**DWV ADAPTER BUSHING SxH (SDR 35)  
 CHAMFER (LONG) SEWER SPIGOT x SOLVENT WELD DWV HUB**

| PART NO. | SIZE IN INCHES | H1      | S1      | W      | D1       |
|----------|----------------|---------|---------|--------|----------|
| * G944   | 4 x 4          | 1 25/32 | 2 13/16 | 4 3/4  | 5 1/32   |
| * G946-4 | 6 x 4          | 1 25/32 | 3 9/16  | 6 9/16 | 5 1/32   |
| * G946   | 6 x 6          | 3 1/16  | 4 1/4   | 7 1/2  | 7 7/32   |
| * G948   | 8 x 8          | 4 1/16  | 3 31/32 | 8 5/16 | 9 11/32  |
| L9410    | 10 x 10        | 5 3/8   | 5 3/8   | 11 3/4 | 11 13/32 |
| L9412    | 12 x 12        | 6 3/8   | 6 3/8   | 13 3/4 | 13 17/32 |

-- DIMENSIONS AND APPEARANCE ARE APPROXIMATE AND SUBJECT TO CHANGE  
 WITHOUT NOTICE DUE TO DESIGN OR PRODUCTION MODIFICATIONS  
 -- MOLDED FITTING TOLERANCE = ±1/8" OVERALL LENGTH  
 -- FABRICATED FITTING TOLERANCE = ±1" LINEAR, ± 2° ANGULAR

\* MOLDED FITTING  
 † ASSEMBLED FROM MOLDED COMPONENTS  
 ALL OTHER FITTINGS ARE FABRICATED