

**ECO-VALVE****Figure # 5592ABW**

Low Lead Brass Ball Valve

Product Features

- 150# WSP / 600# WOG
- Low Lead Brass Body
- Full Port
- Adjustable Packing
- Threaded Ends
- Blow-Out Proof Stem
- CSA 1/2 PSI (1/2" only)
- AB1953, NSF-61 & NSF-372 Certified




Pressure/Temperature Rating

600 PSI from 15°F to 160°F	150 PSI MAX at 366°F
----------------------------	----------------------


Materials & Specifications

Item	Description	Material	Specification
1	Body	Low Lead Brass	C28000
2	End piece	Low Lead Brass	C28000
3	Ball	Low Lead Brass/Cr Plated	C28000
4	Seat	PTFE	PTFE
5	Stem	Low Lead Brass	C28000
6	O-ring	FKM	NSF Approved
7	Packing	PTFE	PTFE
8	Packing nut	Brass	B124 C37700
9	Wing handle	Steel / Dc Plated	A36 Dacromet
10	Handle nut	Steel / Zn Plated	A36

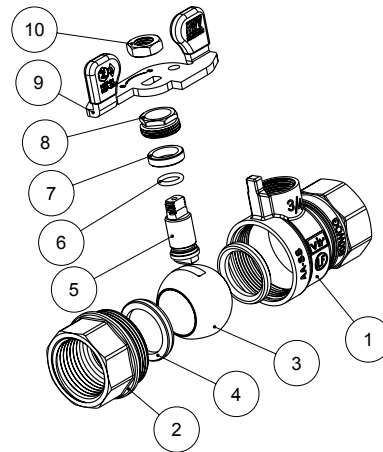

Dimensions, Weights (inches-lbs.) & Valve Data

Size	1/2	3/4	1
A	2.17	2.40	2.91
C	0.61	0.63	0.75
H	1.93	2.05	2.52
L	2.44	2.44	3.27
P	0.50	0.73	0.95
Cv	11	26	55
Wt	0.39	0.53	0.88

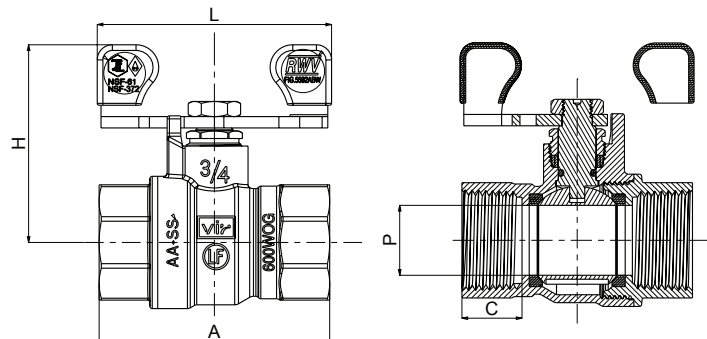**RED-WHITE VALVE CORP.**

20600 Regency Lane, Lake Forest, CA 92630

TEL: 949.859.1010 • FAX: 949.859.7200 • www.redwhitevalvecorp.com

(161215)