

**ECO-VALVE****Figure # 5020ABS**

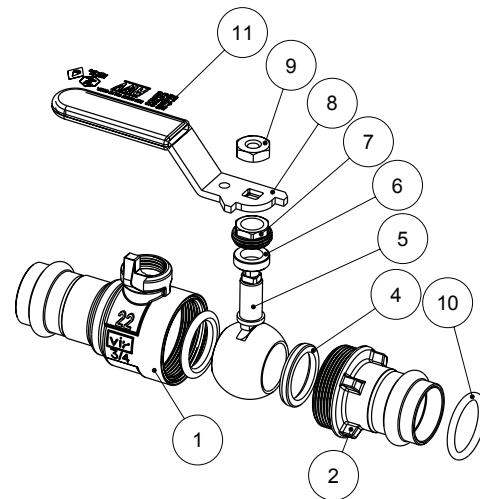
Low Lead Full Port EzPress Ball Valve

Product Features

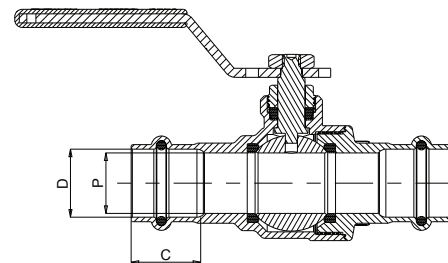
- 600# WOG
- DZR-Brass Body
- Dual EzPress Ends
- Stainless Steel Ball
- Stainless Steel Stem
- PTFE Seats
- Blow-Out Proof Stem
- Adjustable Packing
- MSS-SP-110
- NSF 61-G & NSF 372 Certified

**Technical Specifications**

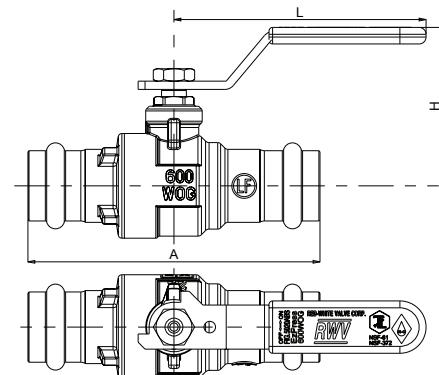
Size	1/2	3/4	1
Cv	15	30	60
T Max - F	266	266	266
P max valve @ 200F	600	600	600
P max connection psi	200	200	200

**Materials & Specifications**

Item	Description	Material	Specification
1	Body	Low Lead Brass	UNS C27453
2	Body cap	Low Lead Brass	UNS C27453
3	Ball	Stainless Steel	316SS
4	Seat	PTFE	PTFE
5	Stem	Stainless Steel	316SS
6	Packing ring	PTFE	PTFE
7	Packing nut	Brass	B124 C37700
8	Handle	Steel / Geomet Plated	A36 Geomet
9	Handle nut	Steel / Zn Plated	A36
10	O-ring	EPDM	EPDM
11	Valve info	-	-

**Dimensions, Weights (inches-lbs.) & Valve Data**

Size	1/2	3/4	1
Ø	0.64	0.88	1.14
A	3.42	4.21	4.64
C	0.79	0.91	0.95
H	2.13	2.26	2.58
L	3.60	3.60	4.98
P	0.59	0.79	0.98
Wt.	0.57	0.85	1.26

**RED-WHITE VALVE CORP.**

20600 Regency Lane, Lake Forest, CA 92630

TEL: 949.859.1010 • FAX: 949.859.7200 • www.redwhitevalvecorp.com

(160114)