


D8650 OLP

Heavy Duty Spring Retractable Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

The heavy duty aluminum cast base and arm of the Series D8000 and E8000 offers the highest rigidity among this class of hose reels. The guide arm is field-adjustable for various truck mounting locations. The durable baked-on, powder-coat finish provides a high quality ultra-violet radiation (sunlight), weather and chip-resistant finish.

Made in USA

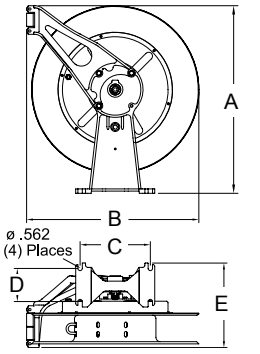

Dimensions	D/E8000 O		D8000 E	
	in	mm	in	mm
A	21 1/8	537	21 5/8	549
B	19	483	20 7/8	530
C	7 7/8	200	7 7/8	200
D	3 3/4	95	3 3/4	98
E	9 1/4	235	10 1/2	267

Enclosed Reels
D8650 ELP



Series D8000 E reels are the same as D8000 O reels except **these reels are fully enclosed**. To order, change the model number suffix letter O to E. Example, D8650 OLP becomes D8650 ELP. Add 17 pounds to open reel weight.

FEATURES

- ✓ The high tensile strength aluminum guide arm and base gives maximum strength with minimum payload weight.
- ✓ A special heavy, double adhesive sided spring case gasket protects the main spring from damage (failure) caused by water, dirt or other foreign matter entering the spring case.
- ✓ Full flow shaft and swivel.
- ✓ Reel springs are manufactured from the highest quality scale-less blue tempered steel.

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		**Max Pressure		(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper	Shipping Weight		Pressure	
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		lbs	kg	psi	bar
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) w/hose / 210 °F (99 °C) w/o hose **Maximum working pressure at 70 °F (20 °C)																	
D8650 OLP	45	20	3/8	10	.600	15	50	15	300	21	1/4	1/2	**D8600 OLP**	40	18	500	35
D8670 OLP	47	21	3/8	10	.600	15	70	21	300	21	1/4	1/2	**D8600 OLP**	40	18	500	35
D8850 OLP	47	21	1/2	13	.750	19	50	15	300	21	3/8	1/2	**D8800 OLP**	41	19	500	35
E8850 OLP*	47	21	1/2	13	.750	19	50	15	300	21	3/8	1/2	**E8800 OLP**	41	19	500	35
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)																	
D8650 OMP	47	21	3/8	10	.690	18	50	15	2600	179	3/8	1/2	**D8600 OMP**	43	20	3000	207
D8840 OMP	53	24	1/2	13	.820	21	40	12	3250	224	1/2	1/2	**D8800 OMP**	43	20	3250	224
D8850 OMP	57	26	1/2	13	.820	21	50	15	3250	224	1/2	1/2	**D8800 OMP**	43	20	3250	224
E8850 OMP*	57	26	1/2	13	.820	21	50	15	3250	224	1/2	1/2	**E8800 OMP**	43	20	3250	224
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)																	
D8450 OHP	53	24	1/4	6	.580	15	50	15	5000	345	1/4	1/2	**D8400 OHP**	44	20	5000	345
D8650 OHP	60	27	3/8	10	.730	19	50	15	4800	331	1/4	1/2	**D8600 OHP**	44	20	5000	345
E8650 OHP*	60	27	3/8	10	.730	19	50	15	4800	331	1/4	1/2	**E8600 OHP**	44	20	5000	345

***Series E8000 models are for lubrication trucks. Low pressure reels furnished standard with PVC hose. Medium pressure reels are furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with SAE 100 R2T two wire braid hose. Reference page 4 for guide arm positions.

Available Options

Optional Roller Guides See page 47

Inlet Hose Assemblies See page 49

Replacement Bumpers See page 49

Replacement Hoses See page 50

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 5 or fewer.

IN Indiana Warehouse | QS Indiana & California Warehouses | CA California Warehouse | Canadian Warehouse

Customer Service: 1.855.634.9109
All Other Calls: 1.800.444.3134