



ECO-VALVE

Figure # 500AB

PP-R Ball Valve

Product Features


- * 300# WOG
- * PP-R80 Body
- * Polyfusion Ends
- * DZR Chrome-plated Ball
- * DZR Stem
- * Virgin PTFE Seats
- * Blow-Out Proof Stem
- * O-ring Packing
- * NSF-61-G & NSF-372 Certified
- * NSF-14



Max Pressure	Max Temperature
300 psi	185°F

Materials & Specifications


Item	Description	Material	Specification
1	Lever Handle	Nylon	PA6-50G
2	O-Ring	NBR	NBR
3	Stem	Low Lead Brass	CW511L
4	Seat	PTFE	PTFE
5	Ball	Low Lead Brass/Cr Plated	CW511L
6	Screw	Steel	Steel
7	Body	Polypropylene	PP-R80

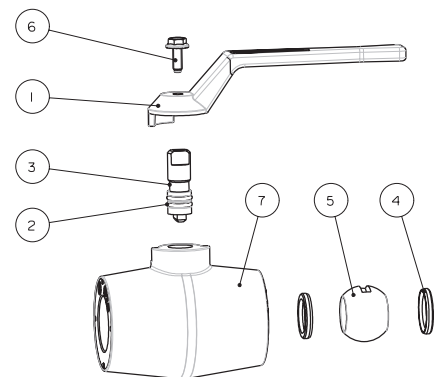

Dimensions, Weights (inches-lbs.) & Valve Data

Size	1/2	3/4	1	1-1/4	1-1/2	2
A	2.66	2.78	3.13	3.70	4.29	5.12
C	0.57	0.63	0.71	0.81	0.93	1.08
D	1.81	2.01	2.28	2.91	3.35	4.13
H	2.36	2.36	2.48	3.07	3.27	4.06
L	4.02	4.02	4.02	4.70	4.70	5.75
P	0.59	0.59	0.79	0.98	1.26	1.57
Wt	0.23	0.30	0.38	0.70	1.02	1.87

Not approved for acid waste applications

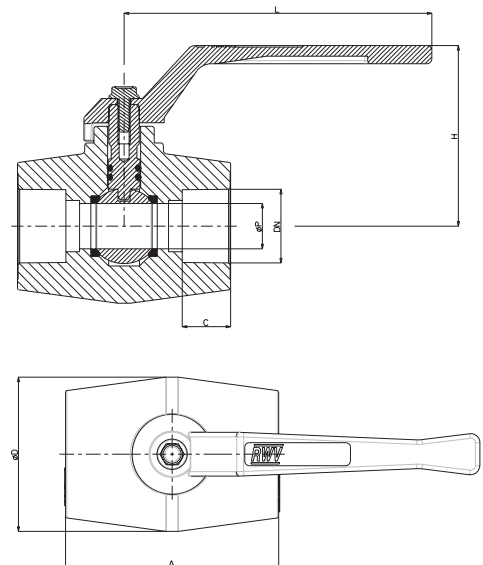

RED-WHITE VALVE CORP.

20600 Regency Lane, Lake Forest, CA 92630

TEL: 949.859.1010 • FAX: 949.859.7200 • www.redwhitevalvecorp.com

(141223)