

**ECO-VALVE****Figure # 5017AB**

Low Lead Brass Ball Pex End Ball Valve

Product Features

- * 400# WOG
- * Brass Body
- * Regular Port
- * Virgin PTFE Seats
- * For use with PEX Tubing
- * Barb x Solder
- * Blow-Out Proof Stem
- * Double NBR O-ring Packing
- * ASTM F1960
- * NSF 61-G & NSF 372 Certified

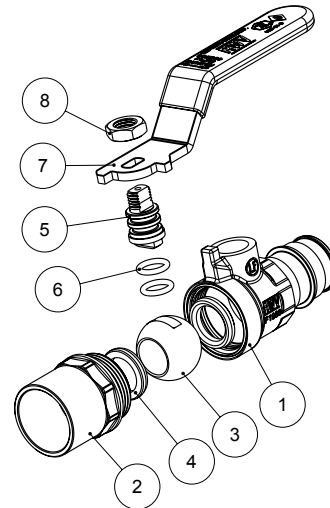


with Wing handle (5017ABW)

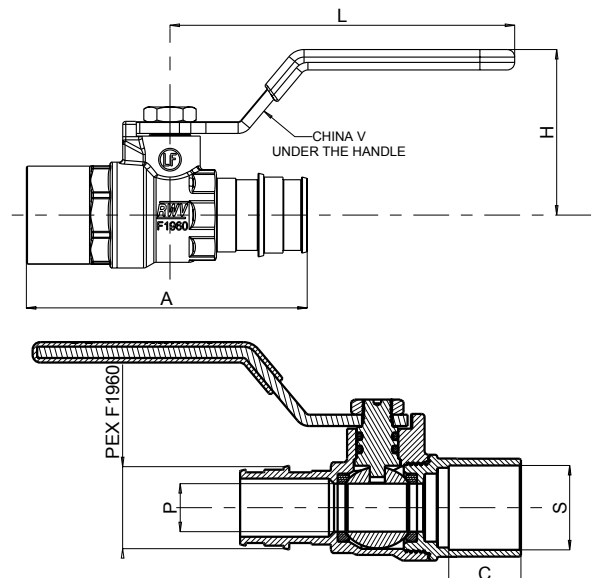
Pressure/Temperature Rating	
300 psi from 15°F to 160°F	150 psi MAX at 200°F

Materials & Specifications

Item	Description	Material	Specification
1	Body	Low Lead Brass	UNS C27453
2	End piece	Low Lead Brass	UNS C27453
3	Ball	Low Lead Brass/Cr Plated	UNS C27453
4	Seat	PTFE	PTFE
5	Stem	Low Lead Brass	UNS C27453
6	O-ring	NBR	NBR
7	Handle	Steel/Dc plated	ASTM A36
8	Nut	Steel/Zn plated	ASTM A36

**Dimensions, Weights (inches-lbs.) & Valve Data**

Size	1/2	3/4	1
A	2.17	2.93	3.46
H	1.38	1.77	1.77
L	3.19	3.58	3.58
P	0.39	0.50	0.73
C	0.51	0.75	0.91
S	0.627-0.631	0.877-0.881	1.128-1.131
Wt	0.26	0.41	0.62

**RED-WHITE VALVE CORP.**

20600 Regency Lane, Lake Forest, CA 92630

TEL: 949.859.1010 • FAX: 949.859.7200 • www.redwhitevalvecorp.com

(150406)