

**Part No:** HTS3S-527

**Schedule 80 PVC & CPVC**

**Hot-Tap Saddle**

**Desc:** 6X1-1/2 PVC HOT TAP SADDLE FKM SS CUTTER

**MSRP:** 1141.32

**Part Code:** 049

**Weight(lbs):** 4.495


**Weight(kg):** 2.039

**Weight(gm):** 2039

**Size:** 6 X 1-1/2 SOC (2"SPG)

**Color:** GRAY

**Material:** PVC

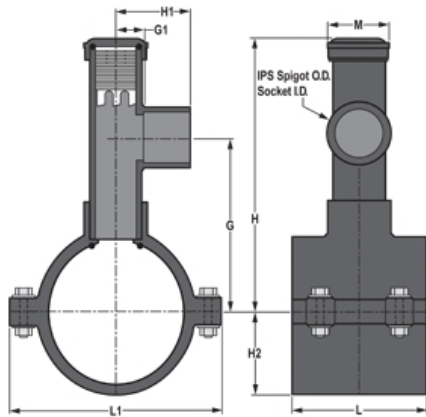

**L** = 4-1/8

**G** = 6-15/16

**G1** = 1-1/4

**H** = 10-15/16

**H1** = 2-11/16

**H2** = 3-13/16

**M** = 2-7/8

**L1** = 8-3/16

**Connection** Saddle x Socket (Spigot) - LEAD FREE

**Hardware** SS316

**O-Ring** FKM

**Cutter** SS316

**Type** Hot-Tap

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

**L** = Overall length of fittings; ± 1/16 inch.

**M** = Outside diameter of socket/thread hub; ± 1/16 inch.

**N** = Socket bottom to socket bottom; couplings; ± 1/16 inch.

**W** = Height of cap; ± 1/16 inch

## Typical Molded Dimension References

