

**Part No:** S1580-12F

**Valves**

**Swing & Spring Check**

**Desc:** 1-1/4 PVC UTILITY SPRNG CHK VLV THD EPDM

**MSRP:** 49.49

**Part Code:** 026

**Weight(lbs):** 0.732


**Weight(kg):** 0.332

**Weight(gm):** 332

**Size:** 1-1/4"

**Color:** WHITE

**Material:** PVC

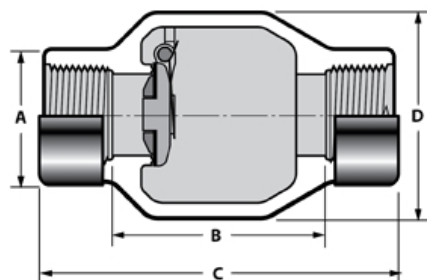

**Type** Utility Spring Check

**Connection** Fipt

**Body Color** White

**Pressure Rating** 150 psi @ 73° F Full Flow (Open)  
75 psi Back Pressure (Closed)

**A** = 2- 1/16

**B** = 3- 5/8

**C** = 5- 1/2

**D** = 3- 3/8

## Fabricated Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/4 & larger ± 1/2 inch.

**H** = Intersection of center lines to face of fitting; 90° elbows, tees, crosses; ± 1/4 inch.; wyes ± 1/2 inch; 14" & larger inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/4 inch; 14" & larger ± 1/2 inch.

**L** = Overall length of fittings; ± 1/2 inch; wyes ± 1 inch; 14" & larger ± 1 inch.

**M** = Outside diameter of socket/thread hub; ± 1/4 inch.

**N** = Socket bottom to socket bottom; couplings; ± 1/2 inch.

**W** = Height of cap; ± 1/4 inch.

## Typical Fabricated Dimension References

