

**Part No:** HTS3S-419

**Schedule 80 PVC & CPVC**

**Hot-Tap Saddle**

**Desc:** 4X1-1/2 PVC HOT TAP SADDLE FKM SS CUTTER

**MSRP:** 1041.54

**Part Code:** 049

**Weight(lbs):** 3.375


**Weight(kg):** 1.531

**Weight(gm):** 1531

**Size:** 4 X 1-1/2 SOC (2"SPG)

**Color:** GRAY

**Material:** PVC

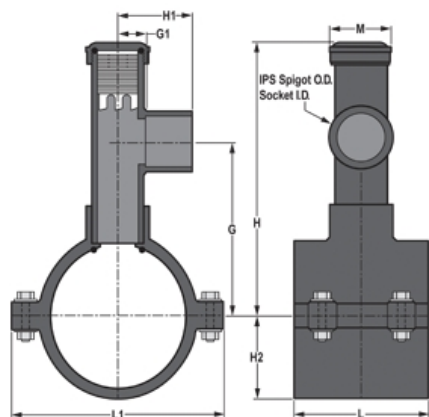

**L** = 4-1/8      **G** = 5-1/4      **G1** = 1-1/4      **H** = 9-5/8      **H1** = 2-11/16  
**H2** = 2-5/8      **M** = 2-7/8      **L1** = 5-13/16

**Connection** Saddle x Socket (Spigot) - LEAD FREE  
**Hardware** SS316  
**O-Ring** FKM  
**Cutter** SS316  
**Type** Hot-Tap

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.  
**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.  
**J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch  
**L** = Overall length of fittings; ± 1/16 inch.  
**M** = Outside diameter of socket/thread hub; ± 1/16 inch.  
**N** = Socket bottom to socket bottom; couplings; ± 1/16 inch.  
**W** = Height of cap; ± 1/16 inch

## Typical Molded Dimension References

