

**Part No:** 42004SR

**FlameGuard®**

**Special Reinforced (SR)  
Transition Fittings**

**Desc:** 3/4X1/2 CPVC RNFRC D ADJ HD A

**MSRP:** 17.63

**Part Code:** 076

**Weight(lbs):** 0.635

**Weight(kg):** 0.288


**Weight(gm):** 288

**Size:** 3/4"X1/2"

**Color:** ORANGE

**Material:** CPVC

**Connection** Spigot x SR Fipt (Adjustable)

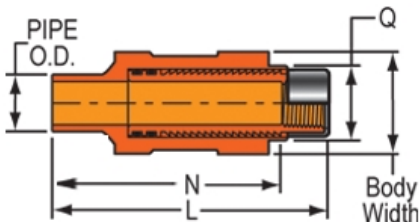

**Q** = 1- 1/4

**L-Min** = 6-3/4

**L-Max** = 8-1/4

**N-Min** = 6

**N-Max** = 7-1/2

**Body  
Width** = 2-3/16

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses;  $\pm 1/32$  inch.

**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses;  $\pm 1/32$  inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows;  $\pm 1/32$  inch

**L** = Overall length of fittings;  $\pm 1/16$  inch.

**M** = Outside diameter of socket/thread hub;  $\pm 1/16$  inch.

**N** = Socket bottom to socket bottom; couplings;  $\pm 1/16$  inch.

**W** = Height of cap;  $\pm 1/16$  inch

## Typical Molded Dimension References

