

► Code Number

1171209

► Description

Vitreous china washdown retrofit urinal

► Flush Cycle

0.125 to 0.5 gpf/0.5 to 1.9 Lpf

Flush volume is determined by the flushometer used with fixture

► Fixture Specifications

- White Vitreous China
- Permanent SloanTec™ hydrophobic antimicrobial glaze inhibits the growth and buildup of germs, bacteria, mold, mildew and mineral scale on the surfaces
- Large footprint to cover old caulk lines
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- All mounting hardware included
- Integral flushing rim
- Vandal resistant strainer assembly included
- 100% factory flush tested
- Washdown flushing action

► Plumbing System Requirements




- Minimum Flow Rate: 18 GPM
- Maximum Static Pressure: 80 PSI
- Minimum Flowing Pressure: 25 PSI

► Product Specification

- Washdown urinal shall be made of vitreous china with a ¾" top spud. Urinal shall have a 2" NPT outlet flange. Urinal shall include a removable strainer, inlet spud and hanger. Urinal shall be Sloan Model SU-1209-STG.

► Notes

- This model is fully interchangeable with Models SU-1200, SU-1202 & SU-1205 and matches all dimensional and performance parameters.
- All information contained in this document subject to change without written notice
- NOTE: All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

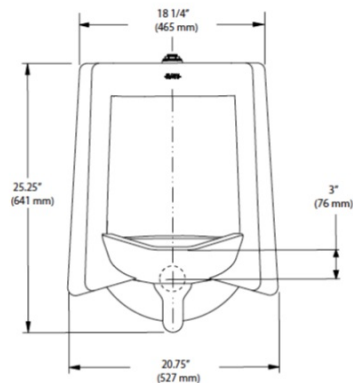

► Compliance & Certifications



CALGreen



This space for Architect/Engineer Approval